
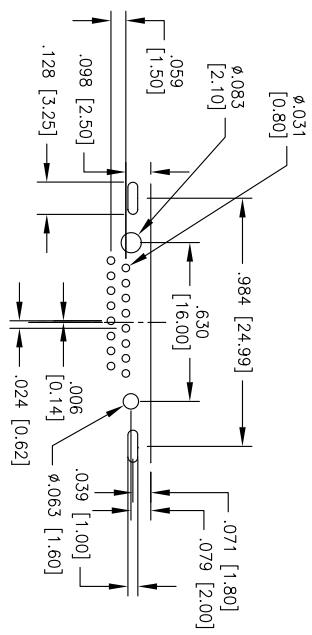




Rev	AWO #	Description	Date	Appr
-		RELEASED	5/19/10	

APPROVED: _____
 DATE: _____ TITLE: _____

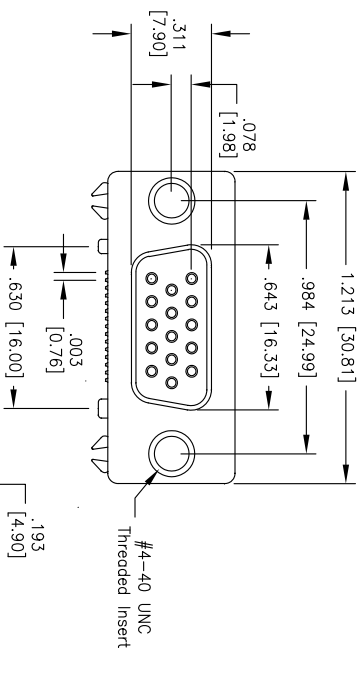

Recommended PCB Layout

PIN NUMBER :	6	11	2	8	13	4	10	15
	1	7	12	3	9	14	5	

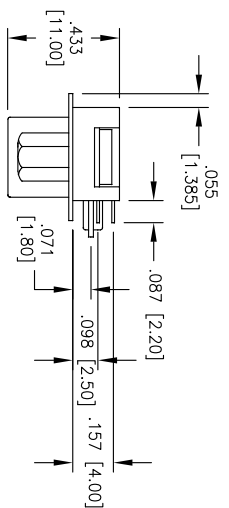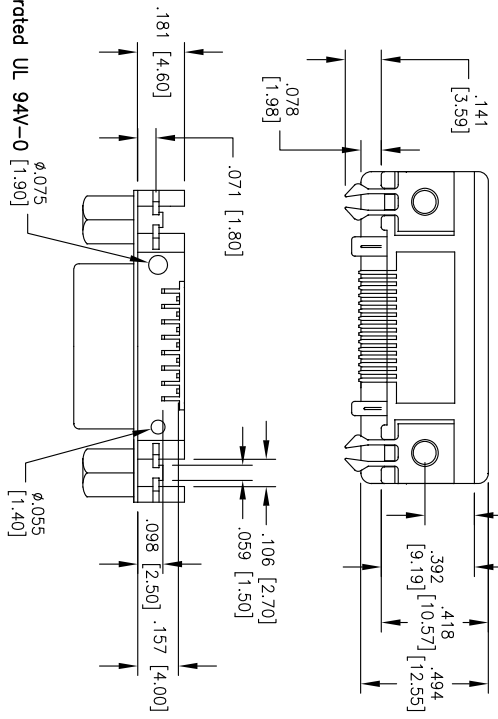

SPECIFICATIONS:

Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0 [1.90]
 Insulator color: Black
 Contacts: Phosphor Bronze
 Shell: Steel, Tin plated.

Plating:
 Gold flash over Nickel underplate overall.

Electrical:
 Rated Voltage: 300V DC

Rated Current: 5A

Contact resistance: 13 mohms max

Insulation resistance: 1000 Mohms min@ DC 500V

Withstanding voltage: 500V AC for 1 minute

Temperature Rating:
 Operating temperature: -55°C to +105°C

Environmental:
 Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec. **ROHS COMPLIANT**

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ϕ X ± .10
.XX ± .020	ϕ XX ± .015
.XXX ± .015	ϕ XXX ± .010

APPROVALS	DATE
DRAWN	5/19/10
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: D-SUB SOCKET, RIGHT ANGLE SLIM TYPE

SIZE	PART NO.	REV.
X	HDL15-SUN-24	
REF: S00003T	SCALE: NTS	SHEET 1 OF 1