

## ESD Protection Zener Diode

### General Description

SDZ6V8AQ in very small SOD-523 SMD plastic package designed to protect one data line from the damage caused by Electro Static Discharge (ESD) and other transients.

### Features and Benefits

- ESD protection of one data line
- Transient protection for data lines to **IEC 61000-4-2 (ESD)**  
Air discharge mode:  $\pm 15\text{kV}$ , Contact discharge mode:  $\pm 8\text{kV}$
- Small package for use in portable equipment
- Full lead(Pb)-free device and RoHS compliant
- Available in "Green" device



SOD-523




### Applications

- ESD protection

### Ordering Information

Part Number	Marking Code	Package	Packaging
SDZ6V8AQ	T6 □	SOD-523	Tape & Reel

### Marking Information

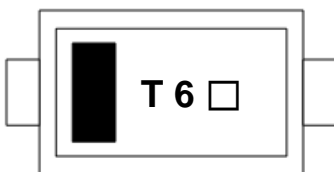

T 6 = Specific Device Code

□ = Year & Week Code Marking

■ = Color band denote cathode

### Pinning Information

Pin	Description	Simplified Outline	Graphic Symbol
1	Cathode		
2	Anode		

**Absolute Maximum Ratings** ( $T_{amb}=25^{\circ}\text{C}$ , Unless otherwise specified)

Characteristic	Symbol	Ratings	Unit
Power dissipation <sup>1)</sup>	$P_D$	120	mW
Operating junction temperature	$T_J$	150	$^{\circ}\text{C}$
Storage temperature range	$T_{stg}$	-55 $^{\circ}\text{C}$ to +150 $^{\circ}\text{C}$	$^{\circ}\text{C}$

<sup>1)</sup> Device mounted on FR-4 board with recommended pad layout.

**Thermal Characteristics** ( $T_{amb}=25^{\circ}\text{C}$ , Unless otherwise specified)

Characteristic	Symbol	Ratings	Unit
Thermal resistance, junction to ambient <sup>1)</sup>	$R_{th(j-a)}$	1042	$^{\circ}\text{C}/\text{W}$

<sup>1)</sup> Device mounted on FR-4 board with recommended pad layout.

**Electrical Characteristics** ( $T_{amb}=25^{\circ}\text{C}$ , Unless otherwise specified)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Zener voltage	$V_Z$	$I_Z=5\text{mA}$	6.2	-	7.1	V
Reverse current	$I_R$	$V_R=3.5\text{V}$	-	-	2	$\mu\text{A}$
Dynamic impedance	$Z_{ZT}$	$I_Z=5\text{mA}$	-	-	30	$\Omega$
Total capacitance	$C_T$	$V_R=0\text{V}$ , $f=1\text{MHz}$	-	12	-	pF

## Rating and Characteristic Curves

Fig. 1) Typical Zener Characteristics



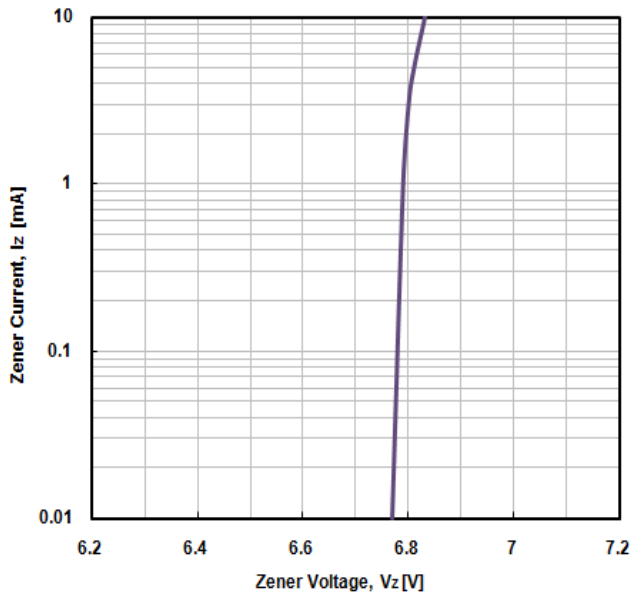


Fig. 2) Power Dissipation vs. Ambient Temperature

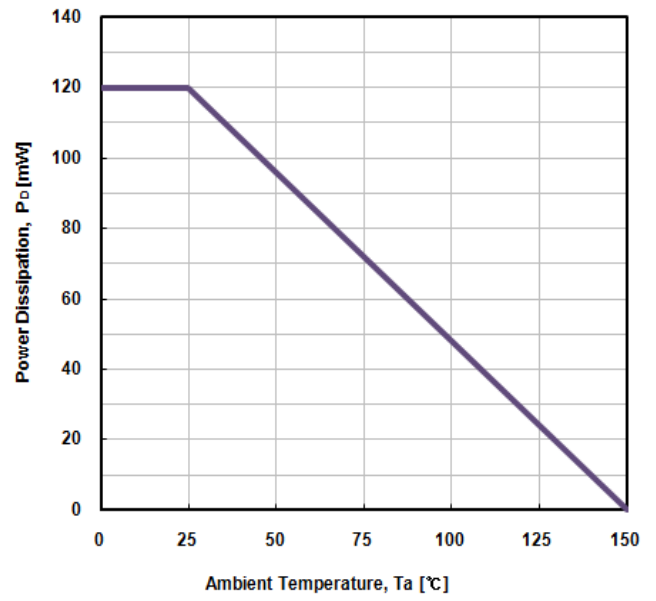


## Package Outline Dimensions

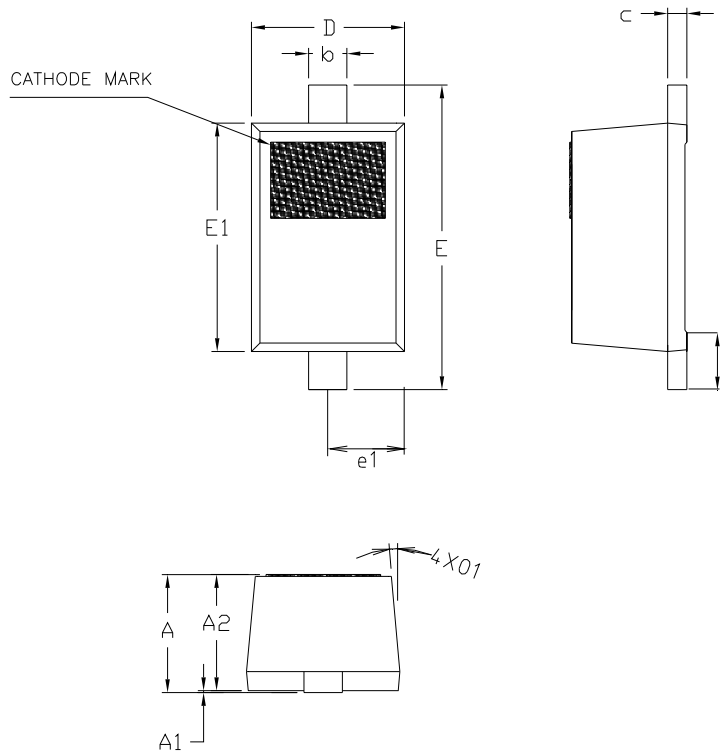

SYMBOL	MILLIMETERS			NOTE
	MINIMUM	NOMINAL	MAXIMUM	
A	0.60	0.70	0.80	
A1	0.00	—	0.10	
A2	0.50	0.60	0.70	
b	0.18	0.25	0.32	
c	0.08	0.12	0.16	
D	0.70	0.80	0.90	
E	1.50	1.60	1.70	
E1	1.10	1.20	1.30	
e1	0.40 BSC			
L	0.20	0.30	0.40	
θ1	4°	—	10°	

※ Recommend PCB solder land (Unit : mm)

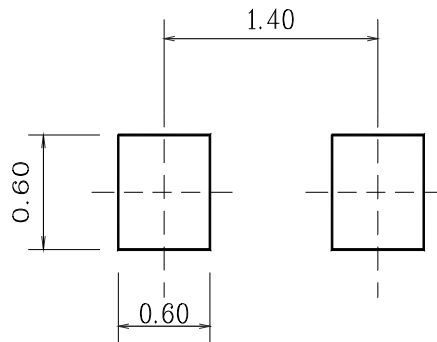

**The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).**

**Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..**

**Specifications mentioned in this publication are subject to change without notice.**