


1SS365

■ Features

- Small-sized package facilitates high-density mounting and permits 1SS365-applied equipment to be made smaller.
- Small interterminal capacitance.
- Low forward voltage.
- High breakdown voltage.

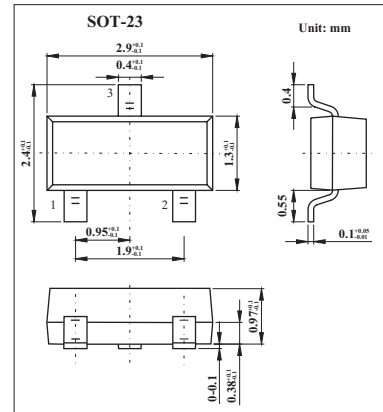

■ Absolute Maximum Ratings Ta = 25 °C

Parameter	Symbol	Value	Unit
Reverse Voltage	V_R	10	V
Forward Current	I_F	35	mA
Junction Temperature	T_j	125	°C
Storage temperature	T_{stg}	-55 to +125	°C

■ Electrical Characteristics Ta = 25 °C

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward Voltage	$V_{F(1)}$	$I_F = 1 \text{ mA}$	350		420	mV
	$V_{F(2)}$	$I_F = 10 \text{ mA}$	480		580	mV
Forward Current	I_F	$V_F = 1 \text{ V}$	35			mA
Reverse Current	$I_{R(1)}$	$V_R = 2 \text{ V}$			0.2	$\mu \text{ A}$
	$I_{R(2)}$	$V_R = 10 \text{ V}$			10	$\mu \text{ A}$
Interterminal Capacitance	C	$V_R = 10 \text{ V}, f = 1 \text{ MHz}$			0.85	pF

■ Marking

Marking	EH
---------	----