

FEATURES

- ▶ 3000VAC reinforced Insulation
- ▶ Insulation rated for 300VAC Working Voltage
- ▶ Medical Safety to UL/CSA/EN/IEC 60601-1 3rd Edition
- ▶ 2 MOOP rated
- ▶ Fully regulated Output Voltage
- ▶ Low Leakage Current
- ▶ Operating Temp. Range -40°C to +75°C
- ▶ Input Filter meets EN 55022, class A and FCC, level A
- ▶ Short Circuit Protection
- ▶ Small DIP-24 Plastic Package
- ▶ 3 Years Product Warrant

NEW



PRODUCT OVERVIEW

The MIDR03M series is a new range of high isolation DC/DC converter modules with a reinforced insulation system. The I/O- isolation voltage is specified for 3000VACrms. The product comes in a small DIP-24 package. There are 15 models available for 5V, 12V and 24V input voltage and single- or dual-output voltage. The MIDR03M DC/DC converters offer a cost effective solution for applications in industrial controls, medical instrumentation and also in consumer electronics requesting a certified supplementary or reinforced insulation system to comply with industrial or latest medical safety standards.

Model Selection Guide

Model Number	Input Voltage	Output Voltage	Output Current	Input Current		Max. capacitive Load	Efficiency (typ.)
			Max.	@Max. Load	@No Load		@Max. Load
	VDC	VDC	mA	mA(typ.)	mA(typ.)	µF	%
MIDR03-05S05M	5 ±10%	5	600	1000	130	470	60
MIDR03-05S12M		12	250	960			62
MIDR03-05S15M		15	200	960			62
MIDR03-05D12M		±12	±125	1000			60
MIDR03-05D15M		±15	±100	1000			60
MIDR03-12S05M	12 ±10%	5	600	420	60	470	60
MIDR03-12S12M		12	250	400			62
MIDR03-12S15M		15	200	400			62
MIDR03-12D12M		±12	±125	420			60
MIDR03-12D15M		±15	±100	420			60
MIDR03-24S05M	24 ±10%	5	600	210	40	470	60
MIDR03-24S12M		12	250	195			64
MIDR03-24S15M		15	200	195			64
MIDR03-24D12M		±12	±125	210			60
MIDR03-24D15M		±15	±100	210			60

For each output

Input Specifications

Parameter	Model	Min.	Max.	Unit
Input Voltage Range	5V Input Models	4.5	5.5	VDC
	12V Input Models	10.8	13.2	
	24V Input Models	21.6	26.4	
Input Surge Voltage (1 sec. max.)	5V Input Models	-0.7	7.5	VDC
	12V Input Models	-0.7	15	
	24V Input Models	-0.7	30	
Reverse Polarity Input Current	All Models	---	0.5	A
Short Circuit Input Power		---	2500	mW
Internal Power Dissipation		---	3000	mW
Conducted EMI		Compliance to EN 55022, class A and FCC part 15, class A		





Output Specifications					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy	At 50% Load and Nominal Vin	---	---	±4.0	%Vnom.
Output Voltage Balance	Dual Output, Balanced Loads	---	±2.0	±4.0	%
Line Regulation	Vin=Min. to Max.	---	±0.3	±0.5	%
Load Regulation	Io=10% to 100%	---	±0.5	±1.0	%
Min.Load	No minimum Load Requirement				
Ripple & Noise	max. 20MHz Bandwidth	---	30	50	mV P-P
Temperature Coefficient		---	±0.01	±0.02	%/°C
Short Circuit Protection	Continuous				

Isolation, Safety Standards					
Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage (reinforced)	60 Seconds	3000	---	---	VACrms
I/O Isolation Test Voltage	Flash tested for 1 Second	4500	---	---	V _{PK}
Leakage Current	240VAC, 60Hz	---	---	2	µA
I/O Isolation Resistance	500 VDC	10	---	---	GΩ
I/O Isolation Capacitance	100KHz, 1V	---	20	---	pF
Safety Standards	cUL/UL60950-1, CSA C22.2 No. 60950-1-03				
	UL60601-1, CSA C22.2 No.601-1,				
	IEC/EN 60950-1, IEC/EN 60601-1 3 rd Edition, 2 MOOP				
Approvals(Pending)	IEC60950-1 CB report, cUL/UL 60950-1 certificate				
	UL60601-1 UL certificate				

General Specifications					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Switching Frequency		25	60	---	KHz
MTBF(calculated)	MIL-HDBK-217F@25°C, Ground Benign	1,000,000	---	---	Hours


Input Fuse		
5V Input Models	12V Input Models	24V Input Models
2000mA Slow-Blow Type	1000mA Slow-Blow Type	500mA Slow-Blow Type

Environmental Specifications					
Parameter	Conditions	Min.	Max.	Unit	
Operating Ambient Temperature Range (See Power Derating Curve)	Natural Convection	-40	+75	°C	
Case Temperature		---	+95	°C	
Storage Temperature Range		-50	+125	°C	
Humidity (non condensing)		---	95	% rel. H	
Cooling	Free-Air convection				
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C	





Power Derating Curve

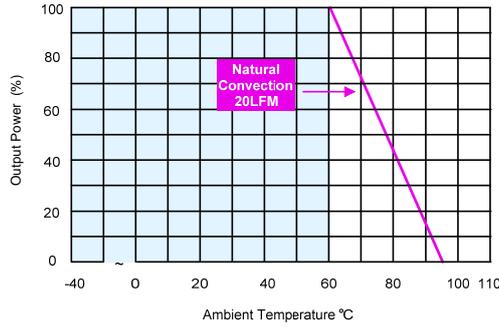


Notes

- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Ripple & Noise measurement bandwidth is 0-20MHz.
- 3 All DC/DC converters should be externally fused at the front end for protection.
- 4 Other input and output voltage may be available, please contact factory.
- 5 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- 6 Specifications are subject to change without notice.

Package Specifications

Mechanical Dimensions

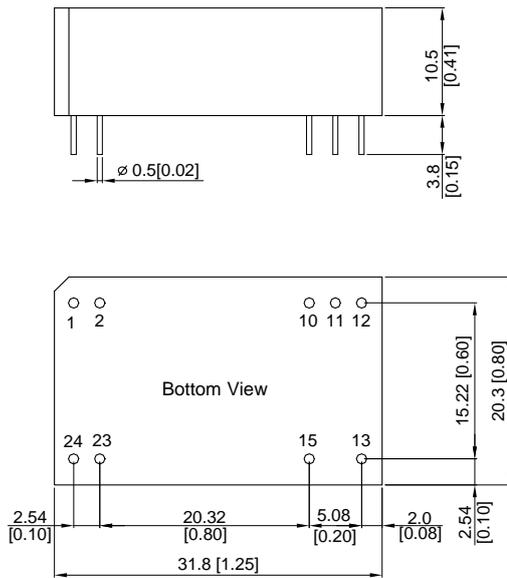

Pin Connections

Pin	Single Output	Dual Output
1	+Vin	+Vin
2	+Vin	+Vin
10	No Pin	Common
11	No Pin	Common
12	-Vout	No Pin
13	+Vout	-Vout
15	No Pin	+Vout
23	-Vin	-Vin
24	-Vin	-Vin

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.25 (X.XX±0.01)
X.XX±0.13 (X.XXX±0.005)
- ▶ Pin diameter $\varnothing 0.5 \pm 0.05$ (0.02±0.002)

Physical Characteristics

Case Size	: 31.8x20.3x10.5 mm (1.25x0.80x0.41 inches)
Case Material	: Non-Conductive Black Plastic (flammability to UL 94V-0 rated)
Pin Material	: Copper Alloy with Gold Plate Over Nickel Subplate
Weight	: 12.4g






Test Setup

Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor L_{in} ($4.7\mu H$) and C_{in} ($220\mu F$, $ESR < 1.0\Omega$ at 100 KHz) to simulate source impedance.

Capacitor C_{in} , offsets possible battery impedance.


Current ripple is measured at the input terminals of the module, measurement bandwidth is $0\text{-}500\text{ KHz}$.

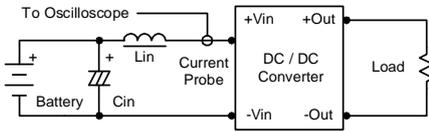

Peak-to-Peak Output Noise Measurement Test

Use a C_{out} $0.33\mu F$ ceramic capacitor.

Scope measurement should be made by using a BNC socket, measurement bandwidth is $0\text{-}20\text{ MHz}$. Position the load between 50 mm and 75 mm from the DC/DC Converter.

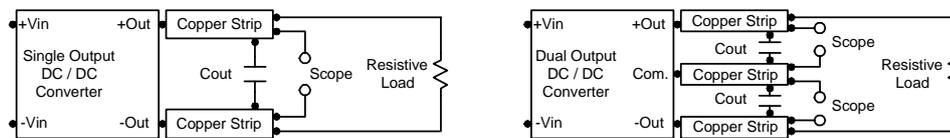

Technical Notes

Maximum Capacitive Load


The MIDR03M series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. For optimum performance we recommend $220\mu F$ maximum capacitive load for dual outputs and $470\mu F$ capacitive load for single outputs. The maximum capacitance can be found in the data sheet.

Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module.


In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.

Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance ($ESR < 1.0\Omega$ at 100 KHz) capacitor of a $4.7\mu F$ for the $5V$ input devices and a $2.2\mu F$ for the $12V$ and $24V$ devices.

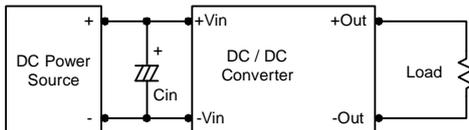

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use $1.5\mu F$ capacitors at the output.

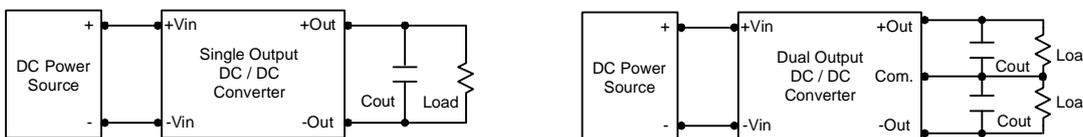

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below $90^\circ C$. The derating curves are determined from measurements obtained in a test setup.

