
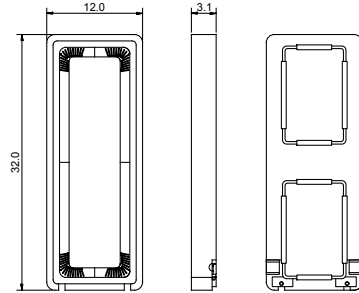



SoniCrest SPEAKER SOUND GENERATORS

HSB3212A



Dimensions

Unit : mm
Tolerance : $\pm 0.3\text{mm}$

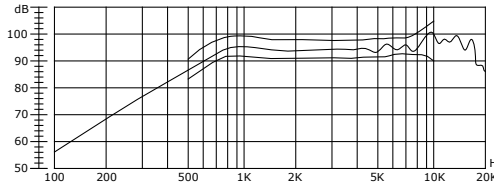

Frequency Response

Normalization to 1W Input Power and
0.1m Measuring Distance

Specification (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (W)	Maximum Input Power (W)	Resonance Frequency (Hz)	*Frequency Range (Hz)	*Sound Pressure Level at 2KHz (dB)	Operating Temperature ($^{\circ}\text{C}$)	Storage Temperature ($^{\circ}\text{C}$)
$4 \pm 20\%$	1	1.5	$600 \pm 20\%$	600 ~ 20000	94 ± 3	-20 ~ +70	-20 ~ +70

HSB3212A-4

The specification are only for 4 Ω version. Specification for other impedance is available upon request.
*Value normalized to 1W input power and 0.1m measuring distance.