

Schottky Barrier Rectifiers

Using the Schottky Barrier principle with a Refractory metal capable of high temperature operation metal. The proprietary barrier technology allows for reliable operation up to 175°C junction temperature. Typical application are in switching Mode Power Supplies such as adaptors, DC/DC converters, free-wheeling and polarity protection diodes.

Features.

- * Low Forward Voltage.
- * Low Switching noise.
- * High Current Capacity
- * Guarantee Reverse Avalanche.
- * Guard-Ring for Stress Protection.
- * Low Power Loss & High efficiency.
- * 175°C Operating Junction Temperature
- * Low Stored Charge Majority Carrier Conduction.
- * Plastic Material used Carries Underwriters Laboratory Flammability Classification 94V-O



* In compliance with EU RoHs 2002/95/EC directives

MAXIMUM RATINGS

Characteristic	Symbol	MBR10200CL	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	200	V
Working Peak Reverse Voltage	V_{RWM}		
DC Blocking Voltage	V_R		
RMS Reverse Voltage	$V_{R(RMS)}$	140	V
Average Rectifier Forward Current (per diode)	$I_{F(AV)}$	5	A
Total Device (Rated V_R), $T_C=125^\circ\text{C}$		10	
Peak Repetitive Forward Current (Rate V_R , Square Wave, 20kHz)	I_{FM}	20	A
Non-Repetitive Peak Surge Current (Surge applied at rate load conditions halfware, single phase, 60Hz)	I_{FSM}	150	A
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +175	°C

THERMAL RESISTANCES


Typical Thermal Resistance junction to case (per device)	$R_{\theta j-c}$	3.4	°C/w
--	------------------	-----	------

ELECTRIAL CHARACTERISTICS


Characteristic	Symbol	Min	Typ.	Max.	Unit
Maximum Instantaneous Forward Voltage (per diode) ($I_F = 0.1$ Amp $T_C = 25^\circ\text{C}$) ($I_F = 2.5$ Amp $T_C = 25^\circ\text{C}$) ($I_F = 5.0$ Amp $T_C = 25^\circ\text{C}$)	V_F	---	0.30 0.82 0.92	0.38 0.88 0.95	V
Maximum Instantaneous Reverse Current (Rated DC Voltage, $T_C = 25^\circ\text{C}$) (Rated DC Voltage, $T_C = 125^\circ\text{C}$)	I_R	---	0.08 15	0.1 30	mA

SCHOTTKY BARRIER RECTIFIERS


**10 AMPERES
200 VOLTS**



TO-220AB

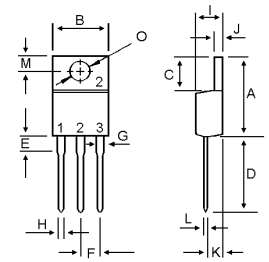

DIM	MILLIMETERS	
	MIN	MAX
A	14.68	15.32
B	9.78	10.42
C	5.02	6.52
D	13.06	14.62
E	3.57	4.07
F	2.42	2.66
G	1.12	1.36
H	0.72	0.96
I	4.22	4.98
J	1.14	1.38
K	2.20	2.98
L	0.33	0.55
M	2.48	2.98
O	3.70	3.90

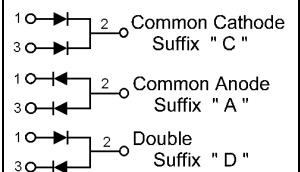

MBR10200CL

FIG-1 FORWARD CURRENT DERATING CURVE

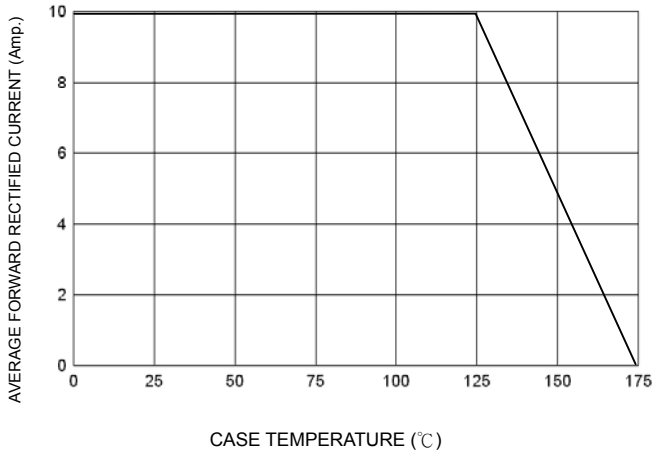


FIG-2 TYPICAL FORWARD CHARACTERISTICS

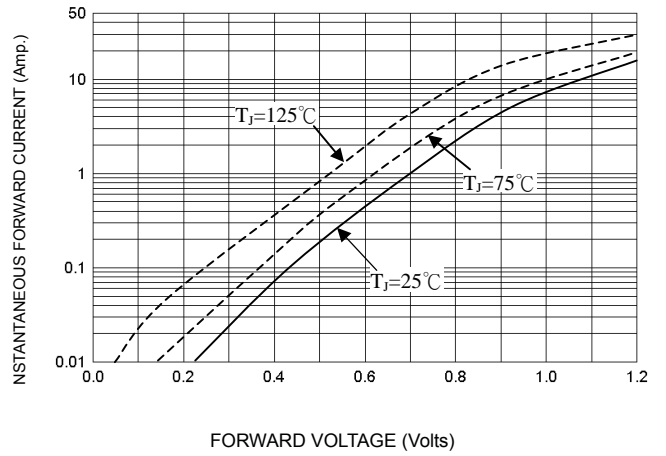


FIG-3 TYPICAL REVERSE CHARACTERISTICS

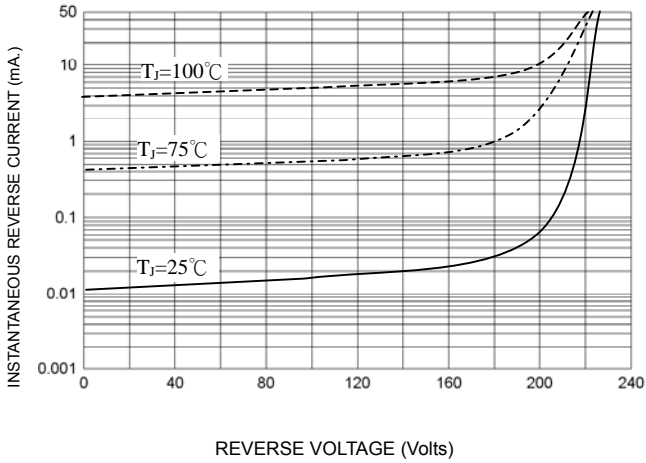


FIG-4 TYPICAL JUNCTION CAPACITANCE

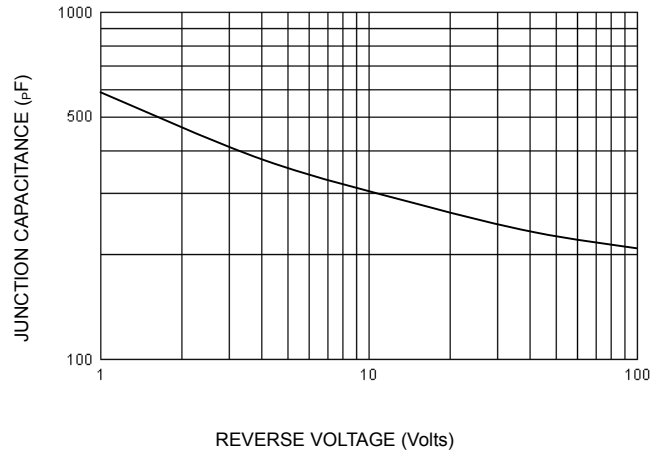


FIG-5 PEAK FORWARD SURGE CURRENT

