
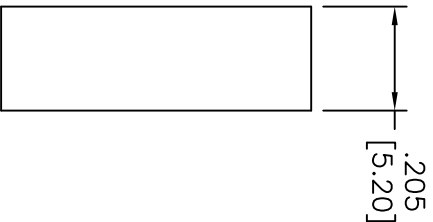
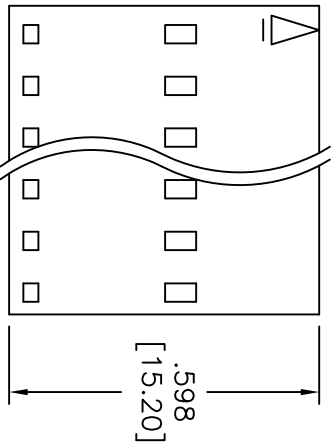


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/03/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

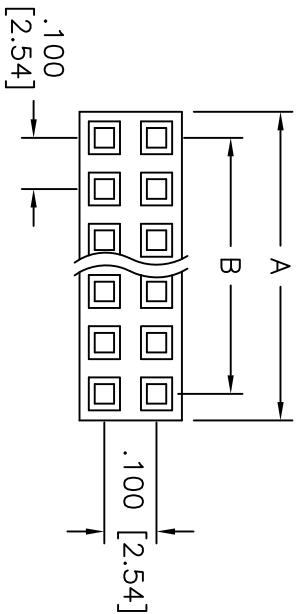

Poles: 4 thru 80  
 A = .100 [2.54] X No. of Positions + .008 [0.20]  
 B = .100 [2.54] X No. of Spaces

**SPECIFICATIONS:**

Material: Insulator: PBT, rated UL 94V-0  
 Insulator color: Black  
 Electrical: Operating voltage: 250 VAC max  
 Current rating: 3 Amps max.  
 Insulation resistance: 1000 Mohms min  
 Dielectric withstanding voltage: 1000 VAC for 1 minute  
 Mechanical: Temperature Rating: Operating temperature: -25°C to +85°C  
 Environmental: Lead free, RoHS compliant.  
 Recommended soldering temp: 235°C for 5 sec.



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

WIRE TO BOARD, FEMALE, .100 [2.54] PITCH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED		TITLE	
INCHES	HOLDS	WIRE TO BOARD, FEMALE, .100 [2.54] PITCH	
.X ± .10	ØX ± .10	SIZE	PART NO.
.XX ± .020	ØXX ± .015	X	MTWD-XX-NP
.XXX ± .015	ØXXX ± .010	REF:	S0006T
APPROVALS	DATE	SCALE:	NTS
DRAWN	DY	6/03/10	
CHECKED			
APPROVED			
		SHEET	1 OF 1

6 5 4 3 2 1