


## isc Three Terminal Negative Voltage Regulator

**7905**

### FEATURES

- Output current in excess of 1.5 A
- Output voltage of 5V
- Internal thermal overload protection
- Output transition Safe-Area compensation
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

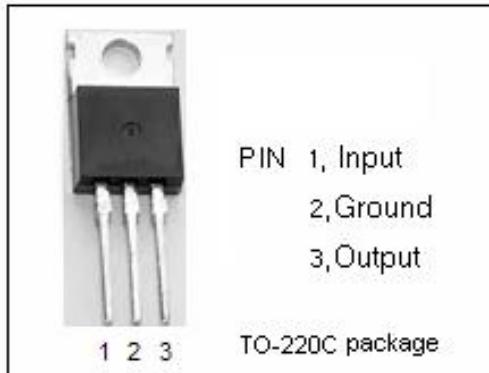


### ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ\text{C}$ )

SYMBOL	PARAMETER	RATING	UNIT
$V_i$	DC input voltage	-35	V
$I_o$	Output current	internally limited	
$P_{tot}$	Power dissipation	internally limited	
$T_{OP}$	Operating junction temperature	0~125	°C
$T_{stg}$	Storage temperature	-55~150	°C

### THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance, Junction to Case	5	°C/W
$R_{th j-a}$	Thermal Resistance, Junction to Ambient	65	°C/W

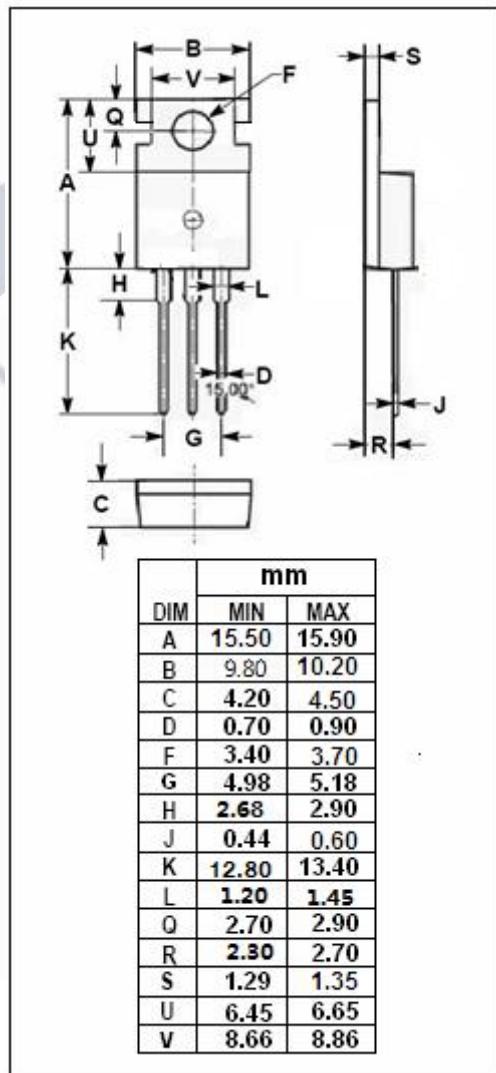

**isc Three Terminal Negative Voltage Regulator****7905****• ELECTRICAL CHARACTERISTICS** $T_j=25^\circ\text{C}$  ( $V_i = -10\text{V}$ ,  $I_o = 0.5\text{A}$ ,  $C_i = 0.33 \mu\text{F}$ ,  $C_o = 0.1 \mu\text{F}$  unless otherwise specified)

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_o$	Output Voltage	$V_{in}=10\text{V}$ ; $I_o=500\text{mA}$	-4.8	-5.2	V
$V_o$	Output Voltage	$I_o=5\text{mA}$ to $1\text{A}$ ; $V_{in}=-7\text{V}$ to $-20\text{V}$	-4.75	-5.25	V
$\Delta V_v$	Line Regulation	$7\text{V} \leq V_{in} \leq 25\text{V}$ ; $I_o=0.5\text{A}$		100	mV
$\Delta V_i$	Load Regulation	$5.0\text{mA} \leq I_o \leq 1.5\text{A}$ ; $V_{in}=10\text{V}$		100	mV
$I_q$	Quiescent Current	$V_{in}=10\text{V}$ ; $I_o=1.5\text{A}$		6.0	mA
$\Delta q_1$	Quiescent Current Change	$5.0\text{mA} \leq I_o \leq 1.0\text{A}$ ; $V_{in}=10\text{V}$		0.5	mA
$\Delta q_2$	Quiescent Current Change	$8\text{V} \leq V_{in} \leq 25\text{V}$ ; $I_o=500\text{mA}$		0.8	mA