


Sketch with main dimensions

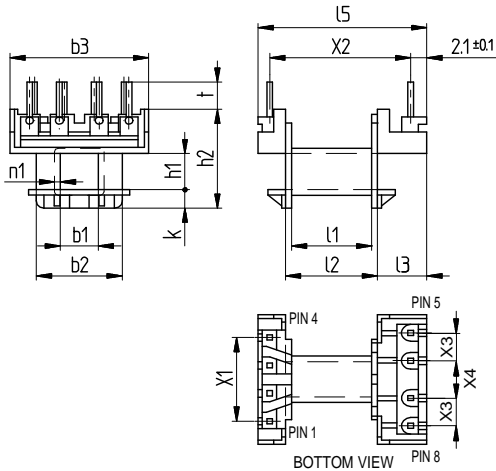


For applications with enlarged creepage distances.

Standard material: Ultramid A3X2G7, natural
Temp. Class B (130°C) UL 94-V0

Creepage distances:

at long bobbin side = 14,50 mm
at short bobbin side = 8,12 mm

ST
with molded-in wires \square 0,6 mm



| b1 | b2 | b3 | h1 | h2 | k | l1 | l2 | l3 | l5 | n1 | t | X1 | X2 | X3 | X4 |
|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| $\pm 0,1$ | $\pm 0,1$ | $\pm 0,2$ | $\pm 0,1$ | $\pm 0,2$ | $\pm 0,1$ | $\pm 0,1$ | $\pm 0,2$ | $\pm 0,2$ | $\pm 0,2$ | $+ 0,2$ | $\pm 0,2$ | $\pm 0,2$ | $\pm 0,2$ | $\pm 0,2$ | $\pm 0,2$ |
| 4,9 | 11,0 | 17,7 | 4,9 | 13,5 | 2,5 | 10,2 | 11,2 | 6,3 | 21,0 | 0,6 | 3,7 | 3x3,81 | 17,78 | 3,81 | 5,08 |

www.FERYSTER.pl

FERYSTER® spółka jawna B. i Z. Sobków
PRODUCENT ELEMENTÓW INDUKCYJNYCH

EF16-K-H-8P-WZ7927