


PRODUCT SPECIFICATION

DATE: 06/10/11'


cosmo ELECTRONICS CORPORATION	Reed Relay :	NO. 50R06009	REV.
	SS1C240000	SHEET 1 OF 2	2

1. OUTSIDE DIMENSION : UNIT (mm)

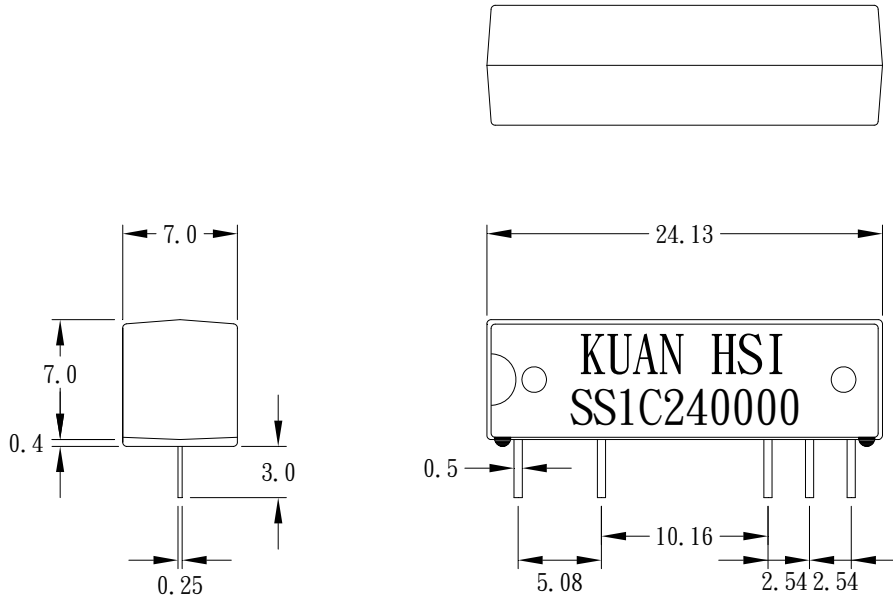

TOLERANCE : ± 0.1 mm

2. SCHEMATIC : TOP VIEW

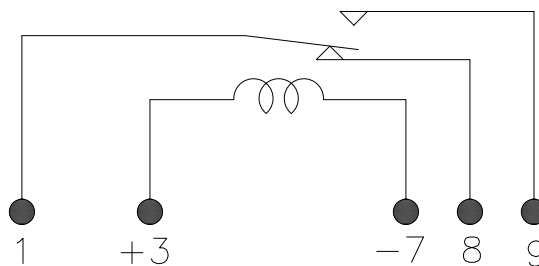

PRODUCT SPECIFICATION

DATE: 06/10/11'

cosmo ELECTRONICS CORPORATION	Reed Relay :	NO. 50R06009	REV.
	SS1C240000	SHEET 2 OF 2	2

3.0 COIL RATINGS : (AT 20°C)

3.1	Coil resistance	2000	Ω	(±10%)
3.2	Nominal coil voltage	24	VDC	
3.3	Maximum Continuous voltage	28	VDC	
3.4	Must operate	18	VDC	
3.5	Must release	2.4	VDC	
3.6	Rated current	12	mA	

4.0 ELECTRONICAL CHARACTERISTICS :

4.1	Contact resistance	150	mΩ	(max)
4.2	Operate time	1.0	ms	(max)
4.3	Bounce time	2.0	ms	(max)
4.4	Release time	1.0	ms	(max)
4.5	Insulation resistance	(100 VDC open contact)	10 ⁹	Ω (min)
4.6	Power	3	VA	(max)
4.7	Switching voltage	100	VDC	(max)
4.8	Switching current	0.25	A	(max)
4.9	Carry current	0.5	A	(max)
4.10	Breakdown voltage	(across open contact)	200	VDC (min)
		(between coil & contact)	1000	VDC (min)
4.11	Life expectancy	(signal level)	5x10 ⁷	
4.12	Operating temp		-40 to 85°C	
4.13	Storage temp		-50 to 125°C	
4.14	Resonant frequency		3.5	KHZ
4.15	Vibration (10-2000HZ)		20	g (max)
4.16	Minimum permissible load		100	mVDC 10uA