


**NOTES:**

- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATORS: PBT GF UL 94 V-0; BLACK
- SIGNAL CONTACTS: COPPER ALLOY; PLATING (SEE PART NO.):  
 PLEASE ADD A for GOLD FLASH over NICKEL (PREFERRED TYPE)  
 PLEASE ADD B for 20µin HARD GOLD over min. 50µin NICKEL  
 PLEASE ADD C for 30µin HARD GOLD over min. 50µin NICKEL
- THREADED LOCK AND SPACER CLIPS: COPPER ALLOY;  
 min. 200µin TIN over 80µin NICKEL  
 PCB-HOLES: Ø3,1 ± 0,1; PCB THICKNESS 1,6mm
- COLLARS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- P.C.B. HOLE DRILLINGS ON SHEET 2
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKED: **164□16759X CONEC ABC** (see note 3)

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance		dim. in mm	scale: 2:1 (5:1)	
				material: SEE NOTES	
	date	name	title: <b>D-SUB FEMALE</b> 50pos. SOLDER PIN STRAIGHT with threaded lock and spacer clip		
	drawn 26.02.2016	Unkrüer			
	appd. 29.02.2016	Lehmenkühler			
norm		dwg no:		DIN-A3	
d-old		16K1A3754		sh: 1	
rev. a	Original	part no: 164□16759X (see note 3)			
description	date				

P.C.B. HOLE DRILLINGS  
(P.C.B. TOP SIDE)

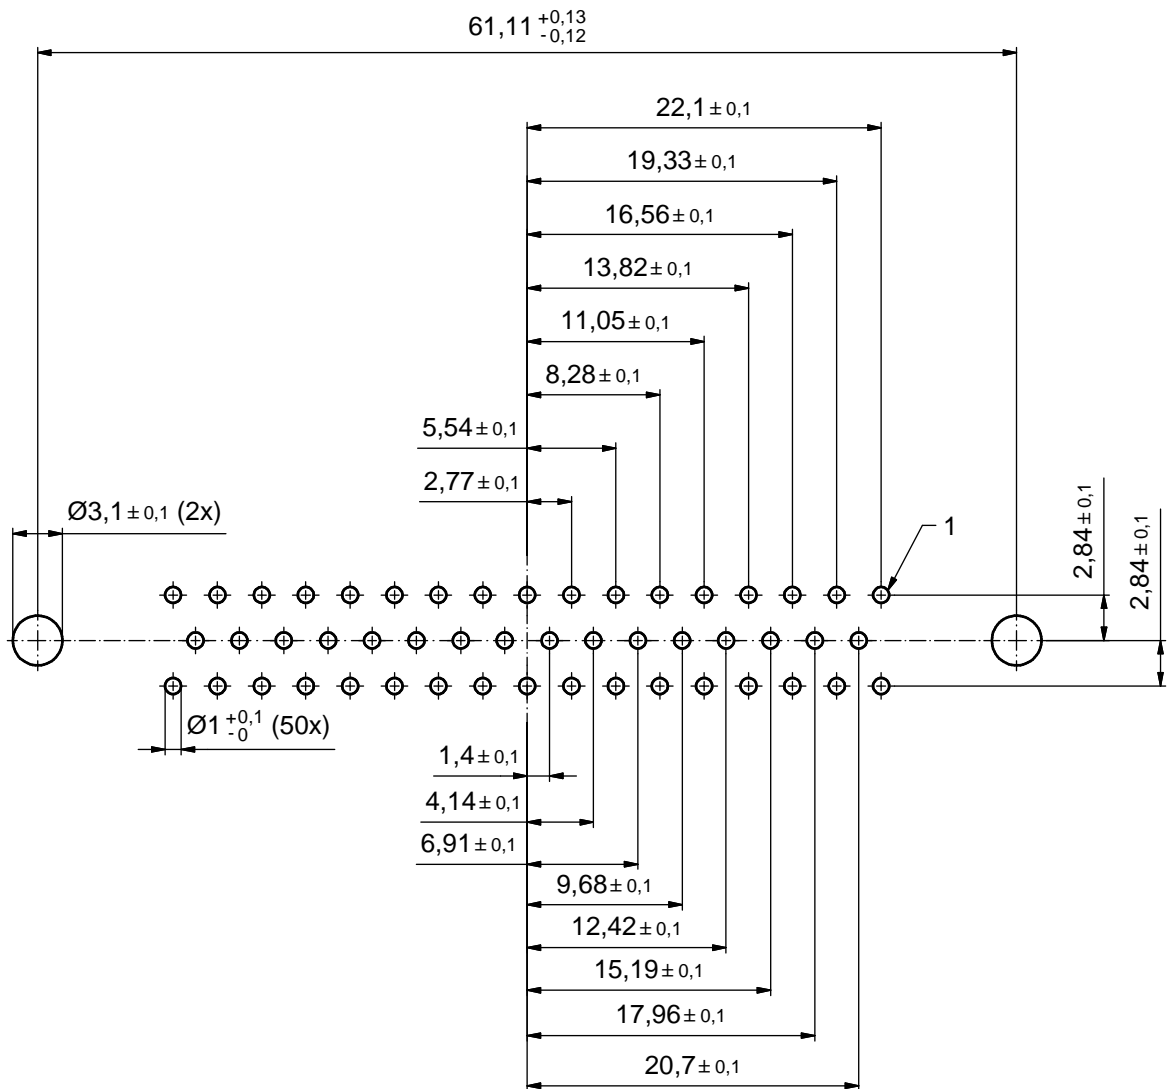

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND				tolerance		scale: 3:1	
					dim. in mm	material: SEE SHEET 1	
				date	name	title: <b>P.C.B. HOLE DRILLINGS</b> D-SUB FEMALE 50pos. SOLDER PIN STRAIGHT with threaded lock and spacer clip	
				drawn 26.02.2016	Unkrüer		
				appd. 29.02.2016	Lehmenkühler		
				norm			
				d-old		dwg no:	
	a	Original		<b>CONEC®</b>		16K1A3754	DIN-A3
	rev.	description	date			name	sh: 2
						part no:	SEE SHEET 1