



TYPICAL PASSBAND CHARACTERISTIC

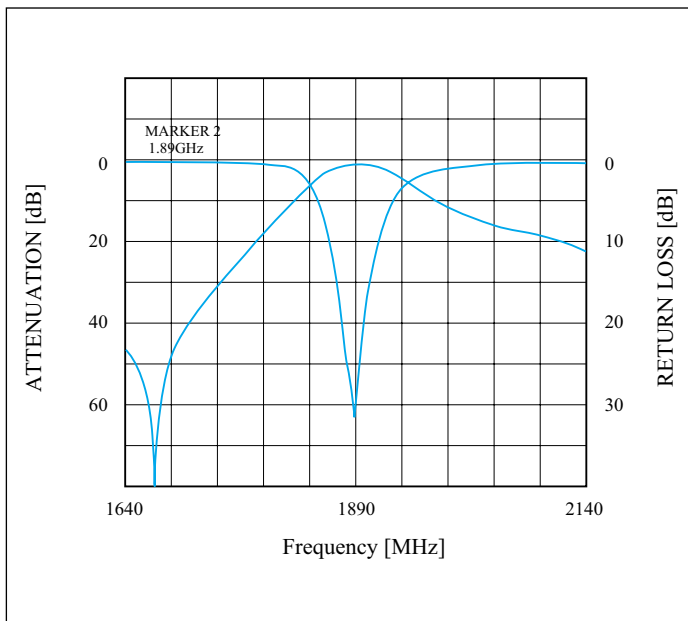

DIMENSION

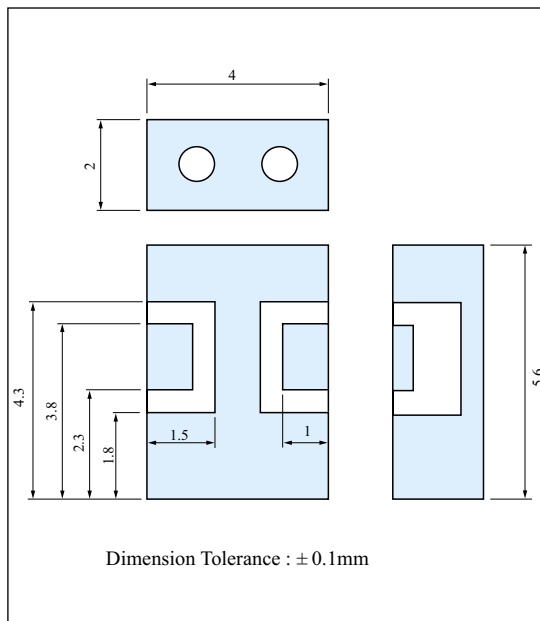

SPECIFICATION

| Application | DECT | | | | |
|---------------------|--------------|--------------|------|------|----------|
| | SYMBOL | Min | Typ. | Max. | Unit |
| Center Frequency | f_0 | | 1890 | | MHz |
| Bandwidth | BW | $f_0 \pm 10$ | | | MHz |
| Insertion Loss | IL | | | 2.0 | dB |
| Ripple | | | | 0.5 | dB |
| Standing Wave Ratio | VSWR | | | 2.0 | |
| Impedance | Z | | 50 | | Ω |
| Attenuation | 1660~1680MHz | 45 | | | dB |
| | 1770~1790MHz | 15 | | | |
| | 3760~3800MHz | 35 | | | |
| | 5640~5700MHz | 10 | | | |