



- T1/E1/CEPT/Octal/Quad Port Module
- Designed to meet ITU-T G.703
- Operating Temperature range: -40°C to +85°C
- Maximum reflow temperature: 250°C/-5°C for 20-40 seconds (Refer to IPC/JEDEC J-STD-02C Standard)

Electrical Specifications @25°C							
Turn Ratio (TX+/-2%)		OCL @10 khZ, 0.1V	LL @100KHz, 0.1V	CWW @100 KHz, 0.1V	DC Resistance Sec(Ω Max)	Crosstalk (dB Typ)	HI-POT (Vrms MIN) Pri to SEC
PRI	SEC	Pri(mH Min)	(uH Max)	(pf Max)			
1:2.4	1:1	1.20	.60	35	-0.9	-60	1500V


Pri pins (1-2,3-4,5-6,7-8,9-10,11-12,13-14,15-16)

All specifications subject to change without notice.

MECHANICAL

Dimension

Unit : mm/inch

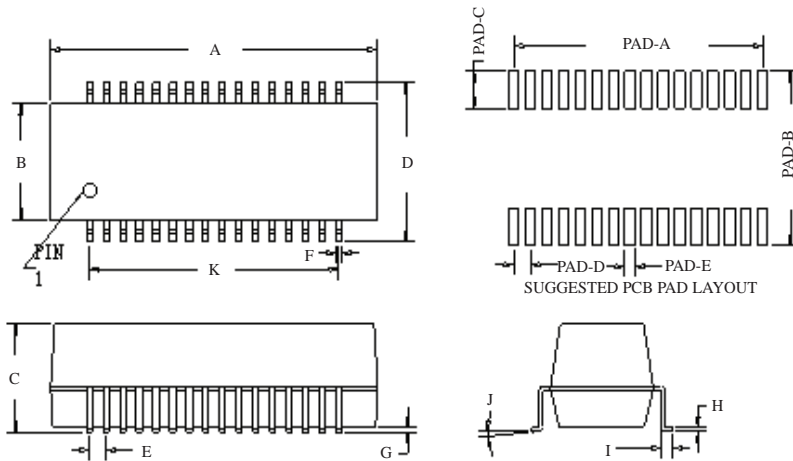

- A=25.50/1.004
- B=7.50/0.295
- C=7.50 max/0.295 max
- D=10.80/0.425
- E=1.27/0.050
- F=0.46/0.018
- G=0.30/0.012
- H=0.25/0.010
- I=0.90/0.035
- J=0°-8°
- K=19.05/0.750
- PAD-A=19.05/0.750
- PAD-B=11.80/0.465
- PAD-C=2.54/0.100
- PAD-D=1.27/0.050
- PAD-E= 0.76/0.030

\square .004/0,10
32 SURFACES

SCHEMATICS

All tolerances are ± 0.25mm / 0.010 inch

