

Silicon NPN Power Transistor

BD933/935/937/939/941

DESCRIPTION

- DC Current Gain-
 : $h_{FE} = 40(\text{Min}) @ I_C = 150\text{mA}$
- Complement to Type BD934/936/938/940/942

APPLICATIONS



- Designed for use in output stages of audio and television amplifier circuits where high peak powers can occur.

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT	
V_{CBO}	Collector-Base Voltage	BD933	45	V
		BD935	60	
		BD937	100	
		BD939	120	
		BD941	140	
V_{CEO}	Collector-Emitter Voltage	BD933	45	V
		BD935	60	
		BD937	80	
		BD939	100	
		BD941	120	
V_{EBO}	Emitter-Base Voltage	5	V	
I_C	Collector Current-Continuous	3	A	
I_{CM}	Collector Current-Peak	7	A	
I_B	Base Current-Continuous	0.5	A	
P_C	Collector Power Dissipation @ $T_c = 25^\circ\text{C}$	30	W	
T_J	Junction Temperature	150	$^\circ\text{C}$	
T_{stg}	Storage Temperature Range	-65-150	$^\circ\text{C}$	

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	4.17	$^\circ\text{C/W}$
$R_{th\ j-a}$	Thermal Resistance, Junction to Ambient	70	$^\circ\text{C/W}$

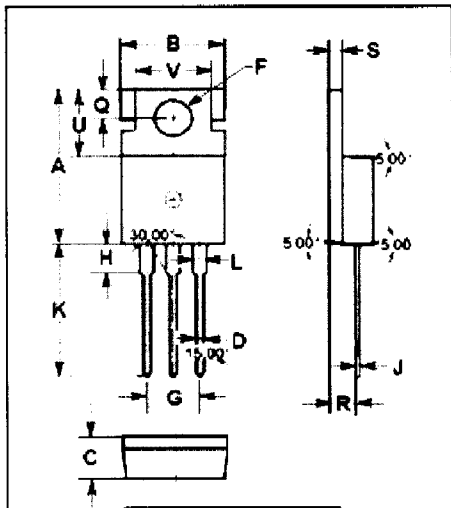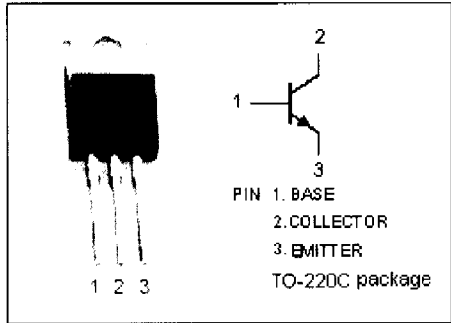

DIM	mm	
	MIN	MAX
A	15.70	15.90
B	9.90	10.10
C	4.20	4.40
D	0.70	0.90
F	3.40	3.60
G	4.98	5.18
H	2.70	2.90
J	0.44	0.46
K	13.20	13.40
L	1.10	1.30
Q	2.70	2.90
R	2.50	2.70
S	1.29	1.31
U	6.45	6.65
V	8.66	8.86



Silicon NPN Power Transistor

BD933/935/937/939/941

ELECTRICAL CHARACTERISTICS

$T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CE(SUS)}$	Collector-Emitter Sustaining Voltage	BD933	$I_C = 100\text{mA}; I_B = 0$			V
		BD935				
		BD937				
		BD939				
		BD941				
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = 1\text{A}; I_B = 0.1\text{A}$			0.6	V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C = 1\text{A}; V_{CE} = 2\text{V}$			1.3	V
I_{CBO}	Collector Cutoff Current	$V_{CB} = V_{CB0max}; I_E = 0$ $V_{CB} = V_{CB0max}; I_E = 0, T_J = 150^\circ\text{C}$			0.05 1	mA
I_{CEO}	Collector Cutoff Current	$V_{CE} = V_{CE0max}; I_B = 0$			0.1	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB} = 5\text{V}; I_C = 0$			0.2	mA
h_{FE-1}	DC Current Gain	$I_C = 150\text{mA}; V_{CE} = 2\text{V}$	40		250	
h_{FE-2}	DC Current Gain	$I_C = 1\text{A}; V_{CE} = 2\text{V}$	25			
f_T	Current-Gain—Bandwidth Product	$I_C = 250\text{mA}; V_{CE} = 10\text{V}$	3			MHz

Switching Times

t_{on}	Turn-On Time	$I_C = 1.0\text{A}; I_{B1} = -I_{B2} = 0.1\text{A}$		0.4	1.0	μs
t_{off}	Turn-Off Time			1.5	3.0	μs