

TOSHIBA Photocoupler Photorelay

# TLP592A



Telecommunications  
 Measurement and Control Equipment  
 Data Acquisition System  
 Measurement Equipment

Unit: mm

The Toshiba TLP592A consists of a gallium arsenide infrared emitting diode optically coupled to a photo-MOSFET in a 6-pin DIP package. This photorelay has higher output current rating than phototransistor-type photocoupler; hence, it is suitable for use as On/Off control for high current.


- Normally open (1-form-A) device
- Peak off-state voltage: 60 V (min)
- Trigger LED current: 3 mA (max)
- On-state current: 500 mA (max)
- On-state resistance: 2 Ω (max)
- Isolation voltage: 2500 Vrms (min)
- UL recognized: UL1557, File No.E67349

## Pin Configuration (top view)

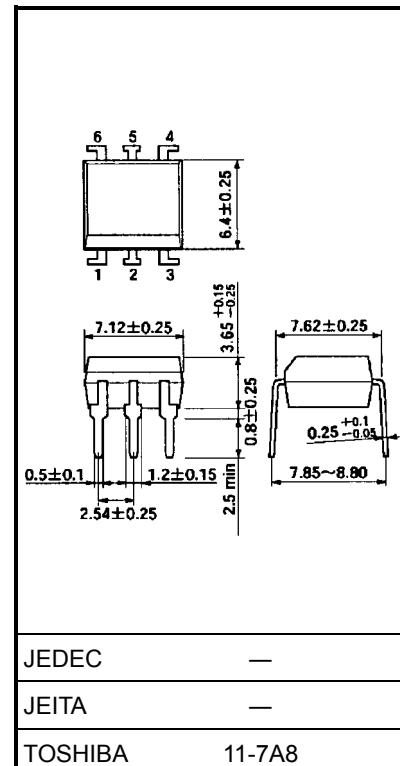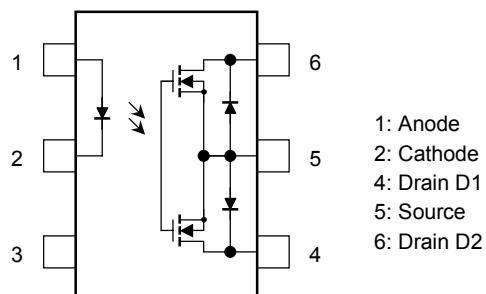

Weight: 0.4 g (typ.)

## Schematic

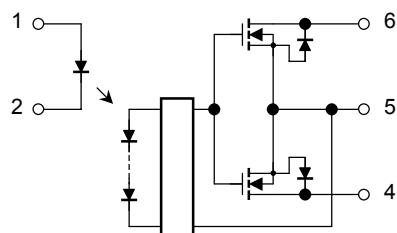

最大定格 ( $T_a = 25^\circ\text{C}$ )


Characteristics		Symbol	Rating	Unit
LED	Forward current	$I_F$	50	mA
	Forward current derating ( $T_a \geq 25^\circ\text{C}$ )	$\Delta I_F / ^\circ\text{C}$	-0.5	mA/ $^\circ\text{C}$
	Peak forward current (100 $\mu\text{s}$ pulse, 100 pps)	$I_{FP}$	1	A
	Reverse voltage	$V_R$	5	V
	Junction temperature	$T_j$	125	$^\circ\text{C}$
Detector	Off-state output terminal voltage	$V_{OFF}$	60	V
	On-state current	$I_{ON}$	500	mA
			500	
			1000	
	Forward current derating ( $T_a \geq 25^\circ\text{C}$ )	$\Delta I_{ON} / ^\circ\text{C}$	-5.0	mA/ $^\circ\text{C}$
			-5.0	
			-10.0	
	Junction temperature	$T_j$	125	$^\circ\text{C}$
	Storage temperature	$T_{stg}$	-55 to 125	$^\circ\text{C}$
	Operating temperature	$T_{opr}$	-40 to 85	$^\circ\text{C}$
Lead soldering temperature (10 s)		$T_{sol}$	260	$^\circ\text{C}$
Isolation voltage (AC, 1 min, R.H. $\leq 60\%$ ) (Note 1)		$BV_S$	2500	Vrms

Note 1: LED pins are shorted together. Detector pins are also shorted together.

## Recommended Operating Conditions

Characteristics	Symbol	Min	Typ.	Max	Unit
Supply voltage	$V_{DD}$	—	—	48	V
Forward current	$I_F$	5	7.5	25	mA
On-state current	$I_{ON}$	—	—	500	mA
Operating temperature	$T_{opr}$	-20	—	65	$^\circ\text{C}$

## Circuit Connections

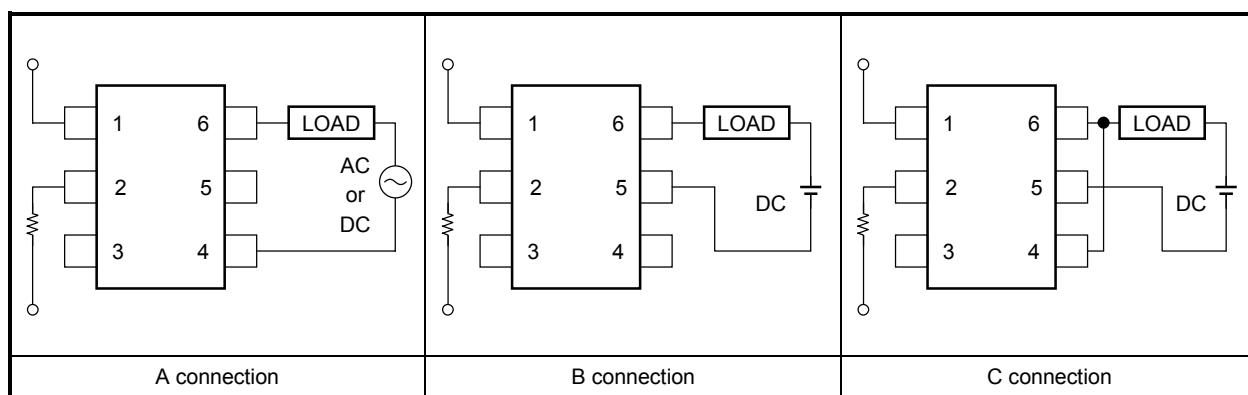

**Electrical Characteristics Ta = 25°C)**

Characteristics		Symbol	Test Condition	Min	Typ.	Max	Unit
LED	Forward voltage	V <sub>F</sub>	I <sub>F</sub> = 10 mA	1.0	1.15	1.3	V
	Reverse voltage	I <sub>R</sub>	V <sub>R</sub> = 5 V	—	—	10	μA
	Capacitance	C <sub>T</sub>	V = 0, f = 1 MHz	—	30	—	pF
Detector	Off-state current	I <sub>OFF</sub>	V <sub>OFF</sub> = 60 V	—	—	1	μA
	Capacitance	C <sub>OFF</sub>	V = 0, f = 1 MHz	—	130	—	pF

**Coupled Electrical Characteristics (Ta = 25°C)**

Characteristics		Symbol	Test Condition	Min	Typ.	Max	Unit
Trigger LED current	I <sub>FT</sub>	I <sub>ON</sub> = 500 mA	—	1.6	3	mA	
Return LED current	I <sub>FC</sub>	I <sub>OFF</sub> = 100 μA	0.1	—	—	mA	
On-state resistance	A connection	R <sub>ON</sub>	I <sub>ON</sub> = 500 mA, I <sub>F</sub> = 5 mA	—	1	2	Ω
	B connection		I <sub>ON</sub> = 500 mA, I <sub>F</sub> = 5 mA	—	0.5	1	
	C connection		I <sub>ON</sub> = 1000 mA, I <sub>F</sub> = 5 mA	—	0.25	—	

**Isolation Characteristics (Ta = 25°C)**

Characteristics	Symbol	Test Condition	Min	Typ.	Max	Unit
Capacitance input to output	C <sub>S</sub>	V <sub>S</sub> = 0 V, f = 1 MHz	—	0.8	—	pF
Isolation resistance	R <sub>S</sub>	V <sub>S</sub> = 500 V, R.H. ≤ 60%	5 × 10 <sup>10</sup>	10 <sup>14</sup>	—	Ω
Isolation voltage	BVS	AC, 1 min	2500	—	—	Vrms
		AC, 1 s, in oil	—	5000	—	
		DC, 1 min, in oil	—	5000	—	Vdc

**Switching Characteristics (Ta = 25°C)**

Characteristics	Symbol	Test Condition	Min	Typ.	Max	Unit
Turn-on time	t <sub>ON</sub>	R <sub>L</sub> = 200 Ω (Note 2) V <sub>DD</sub> = 20 V, I <sub>F</sub> = 5 mA	—	0.8	2	ms
Turn-off time	t <sub>OFF</sub>		—	0.1	0.5	

Note 2: Switching time test circuit

