


SuperSoft™ Ultrafast Rectifiers

SSUR70120

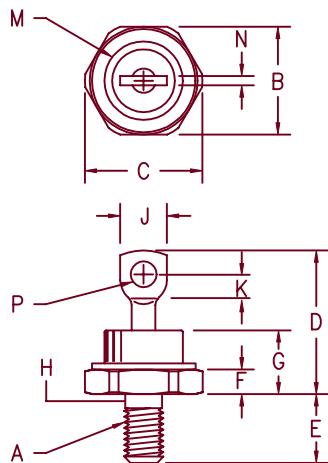

Notes:

1. Full threads within 2 1/2 threads
2. Standard Polarity: Stud is Cathode
Reverse Polarity: Stud is Anode

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.667	.687	1/4-28	UNF 3A	1
B	---	.793	16.94	17.45	
C	---	1.00	---	20.14	
D	---	.422	10.72	25.40	
E	.115	.453	5.59	11.51	
F	.220	.249	6.32	5.08	
G	.250	.375	9.52	11.43	2
H	.140	---	3.56	---	
J	---	.667	16.94	Dia	
K	---	.080	2.03	4.44	
M	---	.175	3.56	Dia	
N	---	---	---	---	
P	---	---	---	---	

D0203AB (D05)

Microsemi Catalog Number	Repetitive Peak Reverse Voltage	Transient Peak Reverse Voltage
SSUR70120*	1200V	1200V

*Add Suffix R For Reverse Polarity

- Soft Recovery Characteristics
- Ultrafast Rectifier
- 70 Amps current rating
- M.I.-PRF-19500 Equivalents Available
- 175°C Junction Temperature
- $\sqrt{V_{RRM}}$ 1200 Volts

Electrical Characteristics

Average forward current
Maximum surge current
Max peak forward voltage
Max peak reverse current
Max peak reverse current
Typical junction capacitance
Max reverse recovery time

$I_F(AV)$ 70 Amps
 I_{FSM} 500 Amps
 V_{FM} 2.30 Volts
 I_{RM} 3.0 mA
 I_{RM} 25 μ A
 C_J 150 pF
 t_{RR} 120 nsec

$T_C = 107^\circ\text{C}$, Square wave, $R_{\theta JC} = 0.7^\circ\text{C}/\text{W}$
8.3 ms, half sine, $T_J = 175^\circ\text{C}$
 $I_{FM} = 70\text{A}$: $T_J = 25^\circ\text{C}$ *
 V_{RRM} , $T_J = 125^\circ\text{C}$
 V_{RRM} , $T_J = 25^\circ\text{C}$
 $V_R = 10.0\text{V}$, $T_J = 25^\circ\text{C}$
 $I_F = 1\text{A}$, $V_R = 30\text{V}$, $di/dt=50\text{A}/\mu\text{s}$

*Pulse test: Pulse width 300 μ sec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range
Operating junction temp range
Max thermal resistance
Typical thermal resistance (greased)
Mounting torque
Weight

T_{STG}
 T_J
 $R_{\theta JC}$
 $R_{\theta CS}$

-65°C to 175°C
-65°C to 175°C
0.7°C/W Junction to case
0.5°C/W Case to sink
25-30 inch pounds
.54 ounces (15.3 grams) typical

SSUR70120

Figure 1
Typical Forward Characteristics

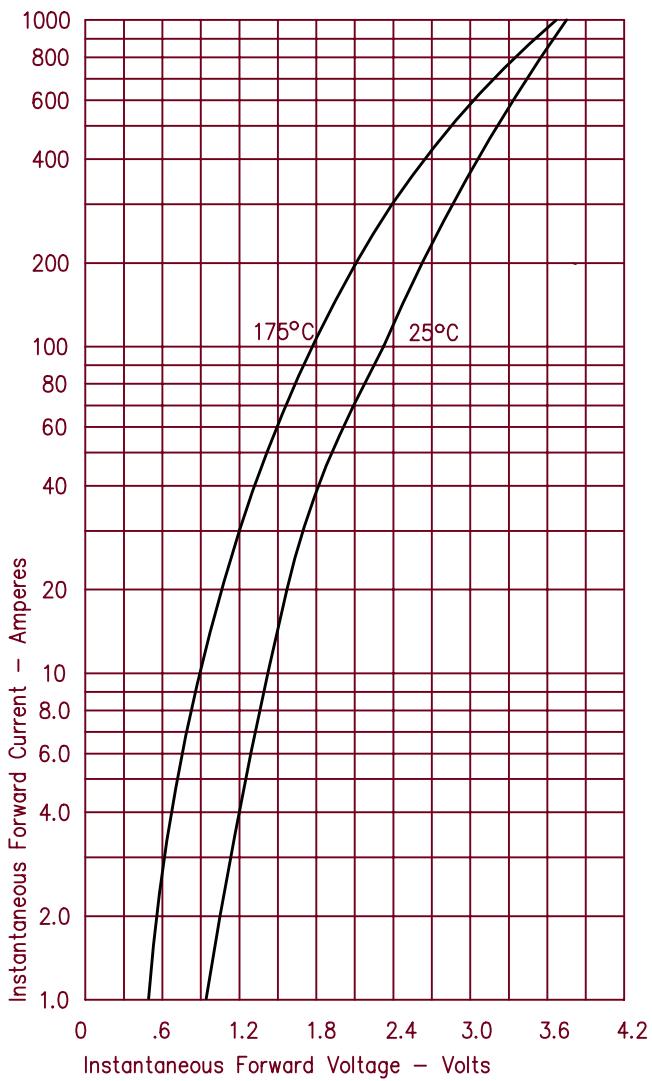


Figure 2
Typical Reverse Characteristics

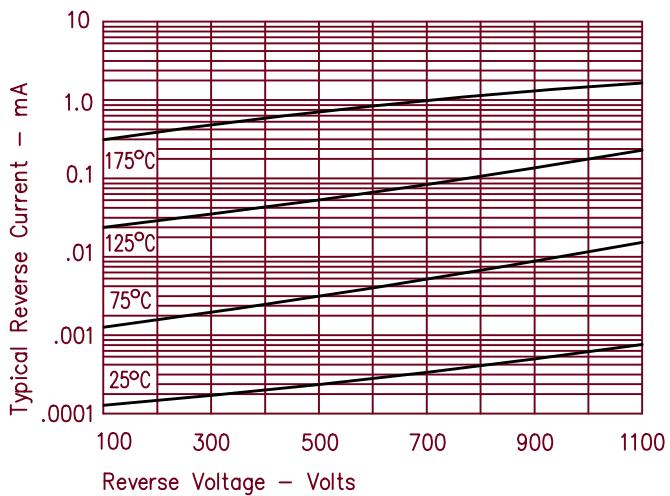


Figure 3
Typical Junction Capacitance

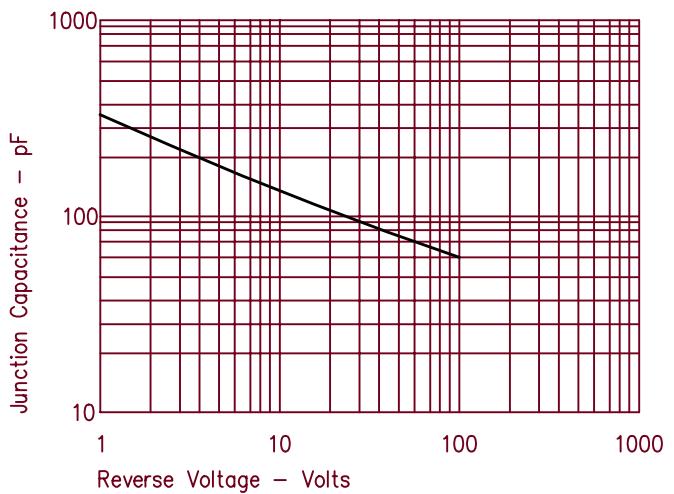


Figure 4
Forward Current Derating

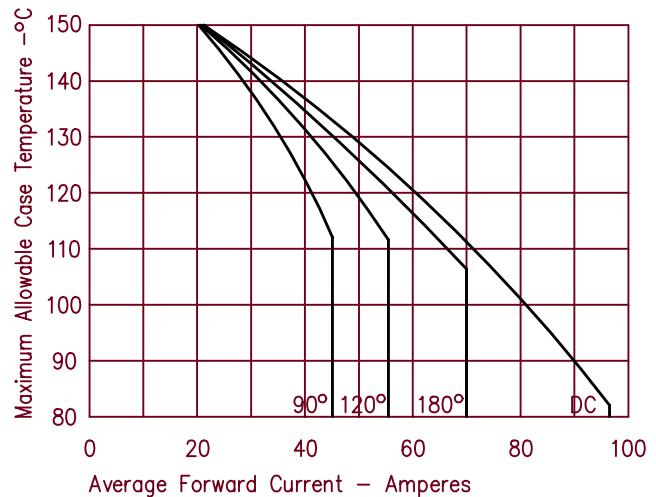


Figure 5
Maximum Forward Power Dissipation

