

FEATURES


- On-chip Active Bias
- DC-4500 MHz Operation Bandwidth
- +27 dBm Output IP3
- 6 dB Noise Figure at 850 MHz
- 20 dB Gain at 850 MHz
- +15 dBm P1dB
- SOT-89 Package
- Single +5 V Supply
- Case Temperature: -40 to +85 °C

APPLICATIONS

- Cellular Base Stations for W-CDMA, CDMA, TDMA, GSM, PCS and CDPD systems
- Fixed Wireless
- MMDS/WLL
- WLAN

PRODUCT DESCRIPTION

The AGB3311 is one of a series of high performance InGaP HBT amplifiers designed for use in applications requiring high linearity, low noise, and low distortion. Active bias circuits on-chip eliminate the need for external resistive feedback, and no external matching components are needed for insertion into a 50 Ω system. With a high output IP3,





low noise figure, and wide band operation, the AGB3311 is ideal for wireless infrastructure applications such as Cellular Base Stations, MMDS, and WLL. Offered in a low cost SOT-89 surface mount package, the AGB3311 requires a single +5 V supply, and typically consumes 0.175 Watts of power.

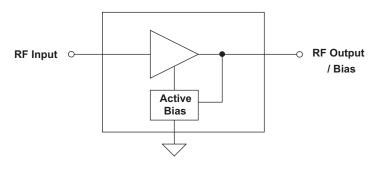


Figure 1: Block Diagram

AGB3311




Figure 2: Pinout (X-ray Top View)

PIN	NAME	DESCRIPTION	
1	RFℕ	RF Input	
2	GND	Ground	
3	RFout	RF Output / Bias	
4	GND	Ground	

ELECTRICAL CHARACTERISTICS

			-
PARAMETER	MIN	MAX	UNIT
Device Voltage (Vcc)	0	+6	VDC
RF Input Power (P _ℕ)	-	+10	dBm
Storage Temperature (Tstg)	-40	+150	°C
Junction Temperature	-	+200	°C

Table 2: Absolute Minimum and Maximum Ratings

Stresses in excess of the absolute ratings may cause permanent damage. Functional operation is not implied under these conditions. Exposure to absolute ratings for extended periods of time may adversely affect reliability.

PARAMETER	IN	ТҮР	MAX	UNIT
Operating Frequency (f) (1)	-	-	4500	MHz
Supply Voltage (VSUPPLY)	-	+5	-	VDC
Case Temperature (Tc)	-40	-	+85	°C

Table 3: Operating Ranges

The device may be operated safely over these conditions; however, parametric performance is guaranteed only over the conditions defined in the electrical specifications.

Notes:

⁽¹⁾ Operating frequency is defined by the output return loss (S22) having a VSWR less than 2:1.

PARAMETER	MIN	ТҮР	MAX	UNIT
Gain (S ₂₁)				
850 MHz	-	20	-	
1950 MHz	-	17.5	-	dB
2140 MHz	-	17.5	-	uв
2450 MHz	-	16.5	-	
Output IP3 (1)				
850 MHz	-	+27	-	
1950 MHz	-	+27	-	dBm
2140 MHz	-	+27	-	UDIII
2450 MHz	-	+27	-	
Output 1dB Compression (P1dB)				
850 MHz	-	+15	-	dBm
Noise Figure				
850 MHz	-	6	-	dB
Thermal Resistance (θJc)	-	320	-	°C/W
Supply Current (Icc)	-	37	-	mA

Table 4: Electrical Specifications (T_A = +25 °C, V_{SUPPLY} = +5 VDC, 50Ω system)

Notes:

(1) OIP3 is measured with two tones at 1 MHz spacing at 0 dBm output power per tone.

○ +5 VDC

2. Performance as measured on ANADIGICS test fixture (see Figure 3).

All capacitors are muRata GRM39 series. The inductor is a Coilcraft 0603CS series.




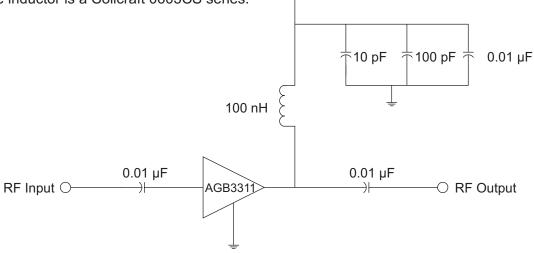


Figure 3: Application Circuit (50 Ω Terminations)

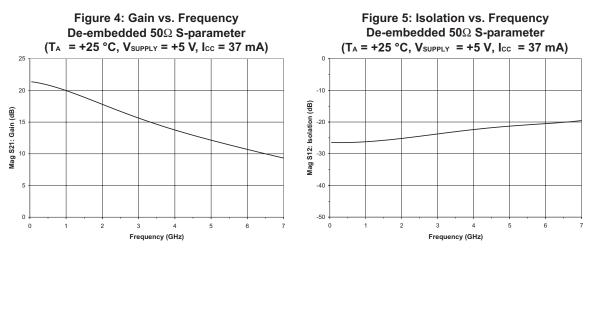

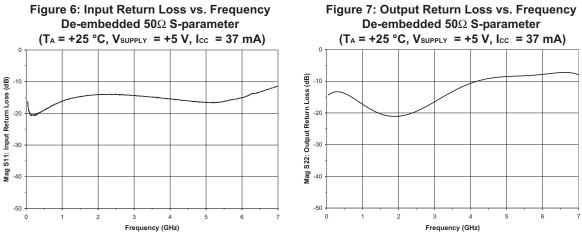

PACKAGE OUTLINE

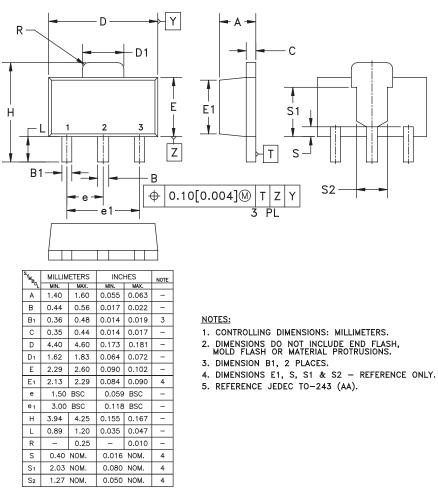



TOP BRAND



NOTES:

- 1. ANADIGICS LOGO SIZE: x=0.040±0.010 Y=0.048±0.010
- 2. PART NUMBER: FOUR NUMERIC CHARACTERS
- 3. WAFER LOT NUMBER: LLLL= FOUR NUMERIC CHARACTERS
- 4. TYPE : ELITE SIZE : 2-POINT COLOR : LASER

Figure 9: Branding Specification

NOTES

ORDERING INFORMATION

PART NUMBER	TEMPERATURE RANGE	PACKAGE DESCRIPTION	COMPONENT PACKAGING
AGB3311S24Q1	-40 to +85°C	SOT-89 Package	1,000 piece Tape and Reel



ANADIGICS, Inc.

141 Mount Bethel Road Warren, New Jersey 07059, U.S.A. Tel: +1 (908) 668-5000 Fax: +1 (908) 668-5132

URL: http://www.anadigics.com E-mail: Mktg@anadigics.com

IMPORTANT NOTICE

ANADIGICS, Inc. reserves the right to make changes to its products or to discontinue any product at any time without notice. The product specifications contained in Advanced Product Information sheets and Preliminary Data Sheets are subject to change prior to a product's formal introduction. Information in Data Sheets have been carefully checked and are assumed to be reliable; however, ANADIGICS assumes no responsibilities for inaccuracies. ANADIGICS strongly urges customers to verify that the information they are using is current before placing orders.

WARNING

ANADIGICS products are not intended for use in life support appliances, devices or systems. Use of an ANADIGICS product in any such application without written consent is prohibited.