

**MAXIM**

# **10Ω, Quad, SPST, +3V Logic-Compatible Analog Switches**

## **General Description**

Maxim's MAX312L/MAX313L/MAX314L analog switches feature low on-resistance (10Ω max) and 1.5Ω on-resistance matching between channels. These switches are +3V logic compatible when powered from ±15V or +12V supplies. The switches conduct equally well in either direction, and offer low leakage over temperature (2.5nA at +85°C).

The MAX312L/MAX313L/MAX314L are quad, single-pole/single-throw (SPST) analog switches. The MAX312L is normally closed (NC), and the MAX313L is normally open (NO). The MAX314L has two NC switches and two NO switches. All three devices operate from a single +4.5V to +36V supply or from dual ±4.5V to ±20V, and are available in 16-pin TSSOP, SO, and DIP packages.

## **Applications**

- Test Equipment
- Communication Systems
- PBX, PABX Systems
- Audio Signal Routing
- Avionics
- Sample-and-Hold Circuits
- Data-Acquisition Systems
- xDSL Modems

Rail-to-Rail is a registered trademark of Nippon Motorola, Ltd.

## **Features**


- ◆ +3V Logic-Compatible Digital Inputs  
VIH = 2.0V  
VIL = 0.8V
- ◆ Pin Compatible with MAX312/MAX313/MAX314 and DG411/DG412/DG413
- ◆ Low On-Resistance (10Ω max)
- ◆ Guaranteed RON Match Between Channels (1.5Ω max)
- ◆ Guaranteed RON Flatness over Specified Signal Range (2Ω max)
- ◆ Crosstalk > 96dB at 20kHz
- ◆ Single-Supply Operation: +4.5V to +36V  
Dual-Supply Operation: ±4.5V to ±20V
- ◆ Rail-to-Rail® Signal Handling

## **Ordering Information**

PART	TEMP. RANGE	PIN-PACKAGE
<b>MAX312LCUE</b>	0°C to +70°C	16 TSSOP
MAX312LCSE	0°C to +70°C	16 Narrow SO
MAX312LCPE	0°C to +70°C	16 Plastic DIP
MAX312LEUE	-40°C to +85°C	16 TSSOP
MAX312LESE	-40°C to +85°C	16 Narrow SO
MAX312LEPE	-40°C to +85°C	16 Plastic DIP

*Ordering Information continued at end of data sheet.*

## **Pin Configurations**

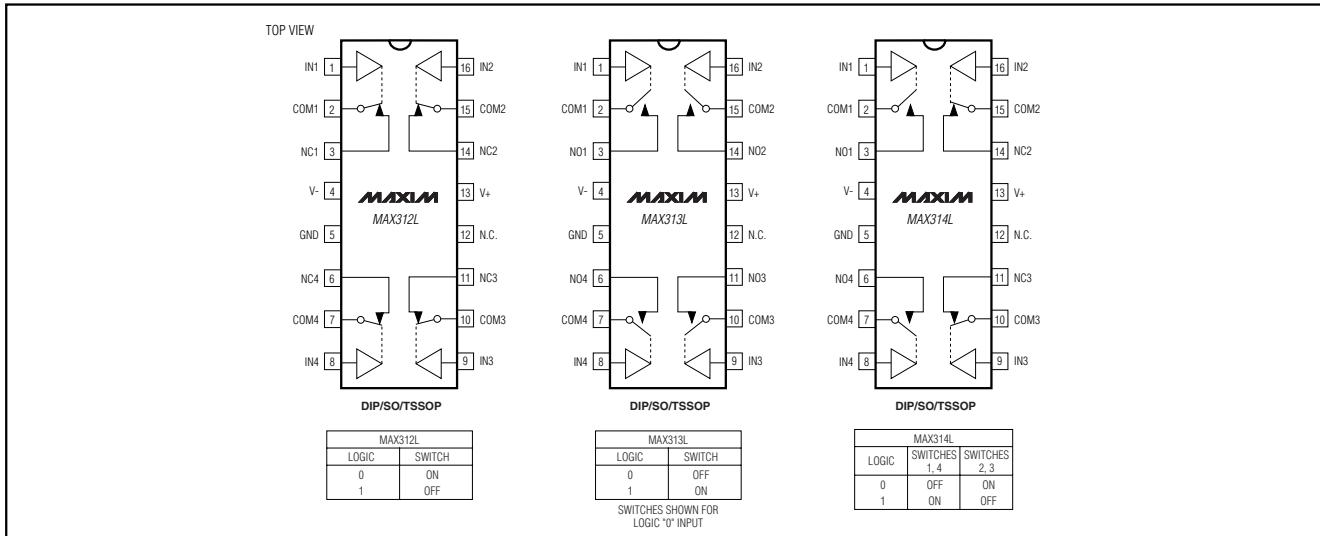**MAXIM**

Maxim Integrated Products 1

**For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at [www.maxim-ic.com](http://www.maxim-ic.com).**

**MAX312L/MAX313L/MAX314L**

# 10Ω, Quad, SPST, +3V Logic-Compatible Analog Switches

## ABSOLUTE MAXIMUM RATINGS

(Voltages Referenced to GND)

V+	-0.3V to +44V
V-	+0.3V to -44V
V+ to V-	-0.3V to +44V
V <sub>IN</sub> _ to V_-	-0.3V to +44V
All Other Pins (Note 1)	(V_- - 0.3V) to (V_+ + 0.3V)
Continuous Current (COM_, NO_, NC_)	±100mA
Peak Current (COM_, NO_, NC_)	(pulsed at 1ms, 10% duty cycle max) ±300mA

Continuous Power Dissipation ( $T_A = +70^\circ\text{C}$ )

TSSOP (derate 6.7mW/°C above +70°C)	457mW
Narrow SO (derate 8.70mW/°C above +70°C)	696mW
Plastic DIP (derate 10.53mW/°C above +70°C)	842mW

Operating Temperature Ranges

MAX31_LC_E	0°C to +70°C
MAX31_LE_E	-40°C to +85°C

Storage Temperature Range

Junction Temperature

Lead Temperature (soldering, 10s)

**Note 1:** Signals on COM\_, NO\_, or NC\_ exceeding V+ or V- are clamped by internal diodes. Limit forward-diode current to maximum current rating.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS—Dual Supplies

(V<sub>+</sub> = +15V, V<sub>-</sub> = -15V, GND = 0, V<sub>IH</sub> = 2.0V, V<sub>IL</sub> = 0.8V, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Notes 2, 3)

PARAMETER	SYMBOL	CONDITIONS	T <sub>A</sub>	MIN	TYP	MAX	UNITS
<b>ANALOG SWITCH</b>							
Analog Signal Range	V <sub>COM</sub> _, V <sub>NO</sub> _, V <sub>NC</sub> _			V-		V+	V
On-Resistance	R <sub>ON</sub>	I <sub>COM</sub> _ = 10mA, V <sub>NO</sub> _ or V <sub>NC</sub> _ = ±10V	+25°C	6.5	10		Ω
			T <sub>MIN</sub> to T <sub>MAX</sub>		15		
On-Resistance Match Between Channels (Note 4)	ΔR <sub>ON</sub>	I <sub>COM</sub> _ = 10mA, V <sub>NO</sub> _ or V <sub>NC</sub> _ = ±10V	+25°C	0.3	1.5		Ω
			T <sub>MIN</sub> to T <sub>MAX</sub>		3		
On-Resistance Flatness (Note 5)	R <sub>FLAT(ON)</sub>	I <sub>COM</sub> _ = 10mA, V <sub>NO</sub> _ or V <sub>NC</sub> _ = -5V, 0, 5V	+25°C	0.2	2		Ω
			T <sub>MIN</sub> to T <sub>MAX</sub>		4		
Off-Leakage Current (NO_ or NC_) (Note 6)	I <sub>NO</sub> I <sub>NC</sub>	V <sub>COM</sub> _ = ±10V, V <sub>NO</sub> _ or V <sub>NC</sub> _ = ±10V	+25°C	-0.5	-0.02	0.5	nA
			T <sub>MIN</sub> to T <sub>MAX</sub>	-2.5		2.5	
COM Off-Leakage Current (Note 6)	I <sub>COM(OFF)</sub>	V <sub>COM</sub> _ = ±10V, V <sub>NO</sub> _ or V <sub>NC</sub> _ = ±10V	+25°C	-0.5	-0.02	0.5	nA
			T <sub>MIN</sub> to T <sub>MAX</sub>	-2.5		2.5	
COM On-Leakage Current (Note 6)	I <sub>COM(ON)</sub>	V <sub>NO</sub> _ or V <sub>NC</sub> _ = ±10V, V <sub>COM</sub> _ = ±10V	+25°C	-1	-0.04	1	nA
			T <sub>MIN</sub> to T <sub>MAX</sub>	-5		5	
<b>DYNAMIC</b>							
Turn-On Time	t <sub>ON</sub>	V <sub>COM</sub> _ = ±10V, R <sub>L</sub> = 300Ω, C <sub>L</sub> = 35pF, Figure 1	+25°C	115	225		ns
			T <sub>MIN</sub> to T <sub>MAX</sub>		275		
Turn-Off Time	t <sub>OFF</sub>	V <sub>COM</sub> _ = ±10V, R <sub>L</sub> = 300Ω, C <sub>L</sub> = 35pF, Figure 1	+25°C	100	185		ns
			T <sub>MIN</sub> to T <sub>MAX</sub>		235		
Break-Before-Make Time Delay (MAX314L only, Note 7)	t <sub>D</sub>	R <sub>L</sub> = 300Ω, C <sub>L</sub> = 35pF, Figure 2	+25°C	1	10		ns
Charge Injection (Note 7)	Q	V <sub>GEN</sub> = 0, R <sub>GEN</sub> = 0, C <sub>L</sub> = 1.0nF, Figure 3	+25°C	-30	20	30	pC

# **10Ω, Quad, SPST, +3V Logic-Compatible Analog Switches**

## **ELECTRICAL CHARACTERISTICS—Dual Supplies (continued)**

( $V_+ = +15V$ ,  $V_- = -15V$ , GND = 0,  $V_{IH} = 2.0V$ ,  $V_{IL} = 0.8V$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .) (Notes 2, 3)

PARAMETER	SYMBOL	CONDITIONS	$T_A$	MIN	TYP	MAX	UNITS
Off-Isolation (Note 8)	$V_{ISO}$	$f = 1MHz$ , $R_L = 50\Omega$ , $C_L = 5pF$ , Figure 4	+25°C		-75		dB
Crosstalk (Note 9)	$V_{CT}$	$f = 1MHz$ , $R_L = 50\Omega$ , $C_L = 5pF$ , Figure 5	+25°C		-85		dB
NC_ or NO_ Off-Capacitance	$C_{OFF}$	$f = 1MHz$ , Figure 6	+25°C		15		pF
COM_ Off-Capacitance	$C_{COM\_}(OFF)$	$f = 1MHz$ , Figure 6	+25°C		15		pF
On-Capacitance	$C_{ON}$	$f = 1MHz$ , Figure 6	+25°C		47		pF
<b>LOGIC INPUT</b>							
Input Logic High	$V_{IH}$				2.0		V
Input Logic Low	$V_{IL}$					0.8	V
Input Current with Input Logic High	$I_{INH}$	$IN_- = 2.0V$		-0.5	0.005	0.5	μA
Input Current with Input Logic Low	$I_{INL}$	$IN_- = 0.8V$		-0.5	0.005	0.5	μA
<b>POWER SUPPLY</b>							
Power-Supply Range	$V_+, V_-$			$\pm 4.5$		$\pm 20.0$	V
Positive Supply Current	$I_+$	$V_+ = +16.5V$ , $V_- = -16.5V$ , $V_{IN} = 0$ or $V_+$	+25°C	0.01	1		μA
			$T_{MIN}$ to $T_{MAX}$		5		
		$V_+ = +16.5V$ , $V_- = -16.5V$ , $V_{IN} = 5V$	+25°C	130	200		
			$T_{MIN}$ to $T_{MAX}$		300		
Negative Supply Current	$I_-$	$V_+ = +16.5V$ , $V_- = -16.5V$ , $V_{IN} = 0$ or $5V$	+25°C		1		μA
			$T_{MIN}$ to $T_{MAX}$		5		
Ground Current	$I_{GND}$	$V_+ = +16.5V$ , $V_- = -16.5V$ , $V_{IN} = 0$ or $V_+$	+25°C	0.01	1		μA
			$T_{MIN}$ to $T_{MAX}$		5		
		$V_+ = +16.5V$ , $V_- = -16.5V$ , $V_{IN} = 5V$	+25°C	130	200		
			$T_{MIN}$ to $T_{MAX}$		300		

## **ELECTRICAL CHARACTERISTICS—Single Supply**

( $V_+ = +12V$ ,  $V_- = 0$ , GND = 0,  $V_{IH} = 2.0V$ ,  $V_{IL} = 0.8V$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .) (Notes 2, 3)

PARAMETER	SYMBOL	CONDITIONS	$T_A$	MIN	TYP	MAX	UNITS
<b>ANALOG SWITCH</b>							
Analog Signal Range	$V_{COM\_}$ , $V_{NO\_}$ , $V_{NC\_}$			0		$V_+$	V
On-Resistance	$R_{ON}$	$I_{COM\_} = 10mA$ , $V_{NC\_}$ or $V_{NO\_} = +10V$	+25°C	12.5	25		Ω
			$T_{MIN}$ to $T_{MAX}$		35		

**MAX312L/MAX313L/MAX314L**

# **10Ω, Quad, SPST, +3V Logic-Compatible Analog Switches**

## **ELECTRICAL CHARACTERISTICS—Single Supply (continued)**

( $V_+ = +12V$ ,  $V_- = 0$ ,  $GND = 0$ ,  $V_{IH} = 2.0V$ ,  $V_{IL} = 0.8V$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .)  
(Notes 2, 3)

PARAMETER	SYMBOL	CONDITIONS	$T_A$	MIN	TYP	MAX	UNITS
On-Resistance Match Between Channels (Note 4)	$\Delta R_{ON}$	$I_{COM\_} = 10mA$ , $V_{NO\_}$ or $V_{NC\_} = +10V$	+25°C	0.3	2		Ω
			$T_{MIN}$ to $T_{MAX}$			2.5	
On-Resistance Flatness (Note 5)	$R_{FLAT(ON)}$	$I_{COM\_} = 10mA$ , $V_{NO\_}$ or $V_{NC\_} = +2V$ , +6V, +10V	+25°C	1.7	3.5		Ω
			$T_{MIN}$ to $T_{MAX}$			4.5	
<b>DYNAMIC</b>							
Turn-On Time	$t_{ON}$	$V_{COM\_} = 8V$ , $R_L = 300\Omega$ , $C_L = 35pF$ , Figure 1	+25°C	165	325		ns
			$T_{MIN}$ to $T_{MAX}$			425	
Turn-Off Time	$t_{OFF}$	$V_{COM\_} = 8V$ , $R_L = 300\Omega$ , $C_L = 35pF$ , Figure 1	+25°C	117	175		ns
			$T_{MIN}$ to $T_{MAX}$			225	
Break-Before-Make Time Delay (MAX314L only, Note 7)	$t_D$	$R_L = 300\Omega$ , $C_L = 35pF$ , Figure 2	+25°C	1	5		ns
Charge Injection	Q	Figure 3, $C_L = 1.0nF$ , $V_{GEN} = 0$ , $R_{GEN} = 0$ ,	+25°C			-10	pC
<b>LOGIC INPUT</b>							
Input Logic High	$V_{IH}$			2.0			V
Input Logic Low	$V_{IL}$					0.8	V
Input Current with Input Logic High	$I_{INH}$	$IN\_ = 2.0V$		-0.5	0.005	0.5	μA
Input Current with Input Logic Low	$I_{INL}$	$IN\_ = 0.8V$		-0.5	0.005	0.5	μA
<b>POWER SUPPLY</b>							
Power-Supply Range	$V_+$			+4.5		+36	V
Positive Supply Current	$I_+$	$V_+ = +13.2V$ , $V_{IN} = 0$ or $V_+$	+25°C	0.01	1		μA
			$T_{MIN}$ to $T_{MAX}$			5	
		$V_+ = +13.2V$ , $V_{IN} = 5V$	+25°C	25	125		
			$T_{MIN}$ to $T_{MAX}$			175	

**Note 2:** The algebraic convention, where the most negative value is a minimum and the most positive value a maximum, is used in this data sheet.

**Note 3:** -40°C specifications are guaranteed by design.

**Note 4:**  $\Delta R_{ON} = \Delta R_{ON \text{ max}} - \Delta R_{ON \text{ min}}$ .

**Note 5:** Flatness is defined as the difference between the maximum and minimum value of on-resistance as measured over the specified analog signal range.

**Note 6:** Leakage parameters are 100% tested at maximum-rated hot temperature and guaranteed by correlation at +25°C.

**Note 7:** Guaranteed by design.

**Note 8:** Off-isolation =  $20\log_{10} [V_{COM}/(V_{NC} \text{ or } V_{NO})]$ ,  $V_{COM}$  = output,  $V_{NC}$  or  $V_{NO}$  = input to off switch.










**Note 9:** Between any two switches.

# **10Ω, Quad, SPST, +3V Logic-Compatible Analog Switches**

## **Typical Operating Characteristics**

( $T_A = +25^\circ\text{C}$ , unless otherwise noted.)







**MAX312L/MAX313L/MAX314L**

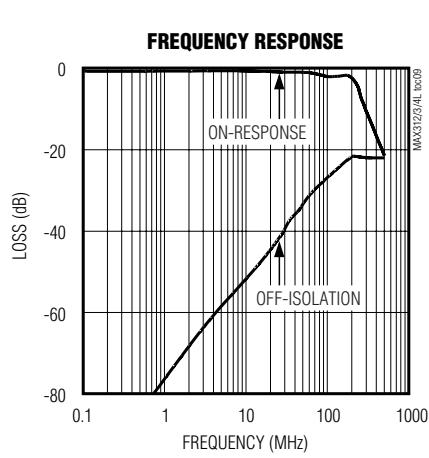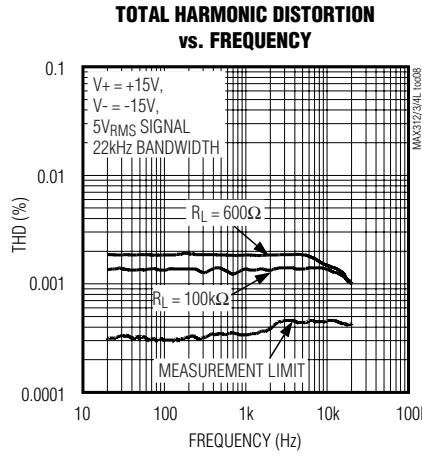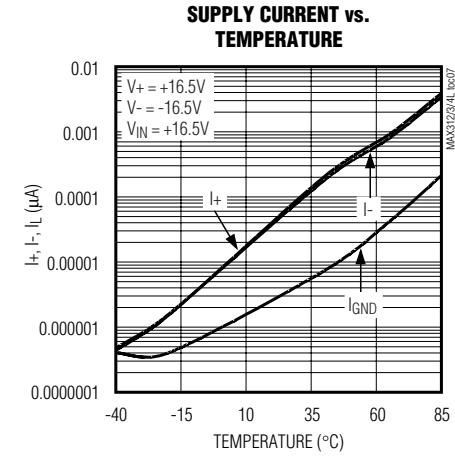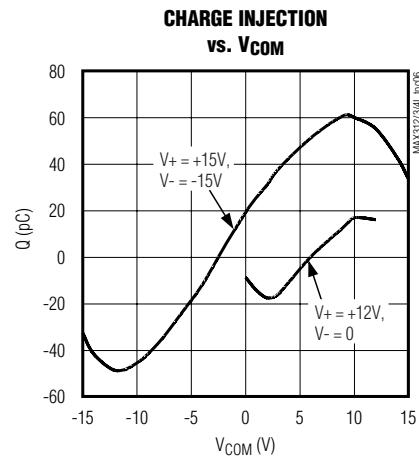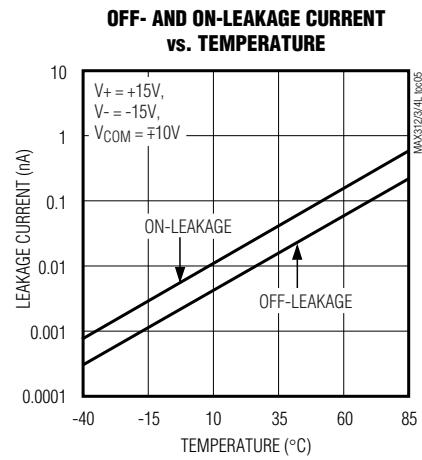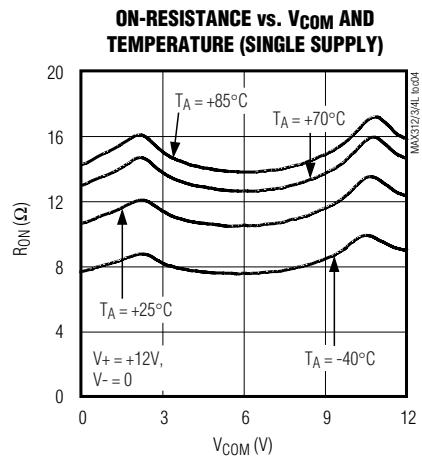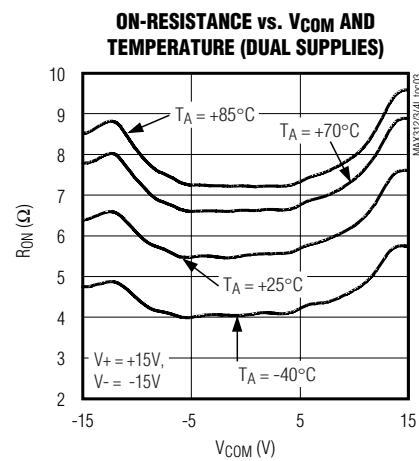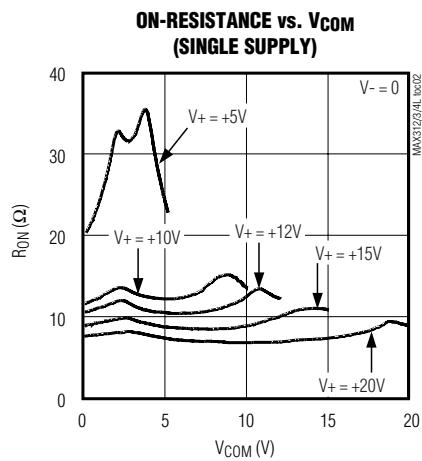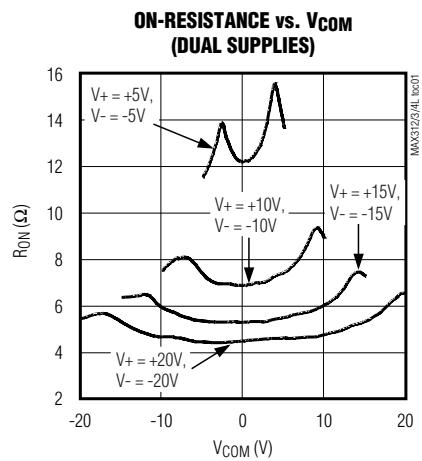

# **10Ω, Quad, SPST, +3V Logic-Compatible Analog Switches**

## **Typical Operating Characteristics (continued)**

( $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

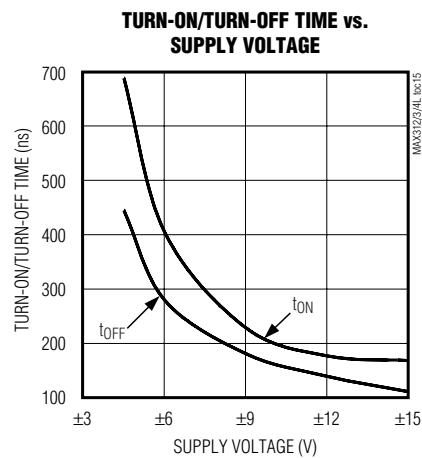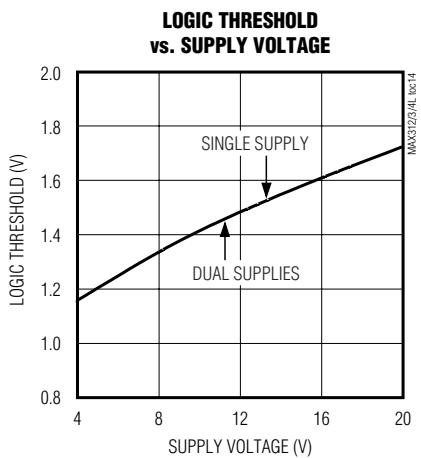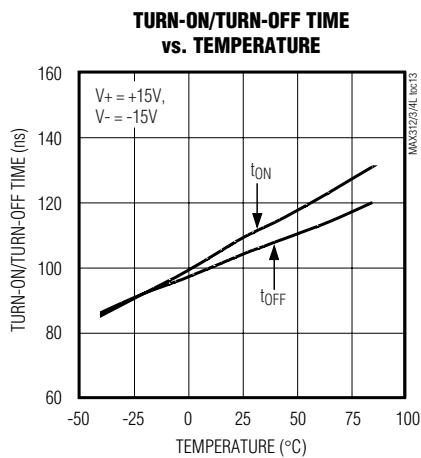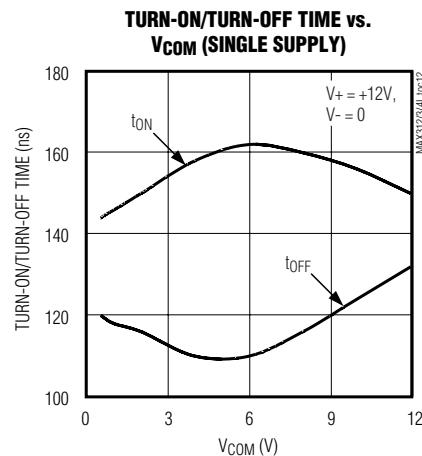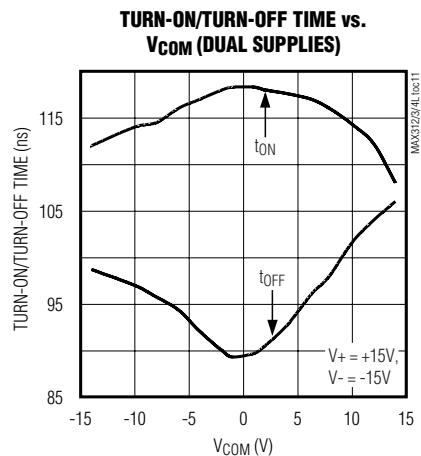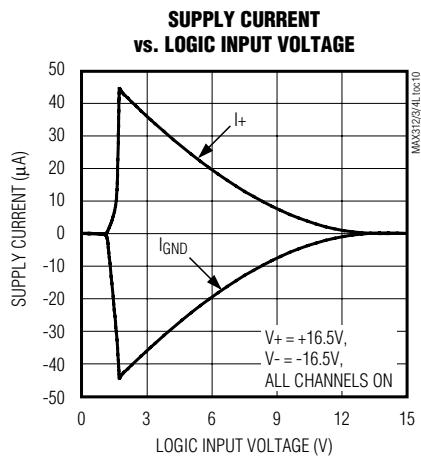

# 10Ω, Quad, SPST, +3V Logic-Compatible Analog Switches

## Pin Description

PIN			NAME	FUNCTION
MAX312L	MAX313L	MAX314L		
1, 8, 9, 16	1, 8, 9, 16	1, 8, 9, 16	IN1, IN4, IN3, IN2	Logic Inputs
2, 7, 10, 15	2, 7, 10, 15	2, 7, 10, 15	COM1, COM4, COM3, COM2	Analog Signal Common Terminals
3, 6, 11, 14	—	—	NC1, NC4, NC3, NC2	Analog Signal Normally Closed Terminals
—	3, 6, 11, 14	—	NO1, NO4, NO3, NO2	Analog Signal Normally Open Terminals
—	—	3, 6	NO1, NO4	Analog Signal Normally Open Terminals
—	—	11, 14	NC3, NC2	Analog Signal Normally Closed Terminals
4	4	4	V-	Negative Analog Supply Input (connect to GND for single-supply operation)
5	5	5	GND	Ground
12	12	12	N.C.	No Connection. Not internally connected.
13	13	13	V+	Positive Analog Supply Input

## Applications Information

### Low-Distortion Audio

The MAX312L/MAX313L/MAX314L, having very low R<sub>ON</sub> and very low R<sub>ON</sub> variation with signal amplitude, are well suited for low-distortion audio applications. The *Typical Operating Characteristics* show Total Harmonic Distortion (THD) vs. Frequency graphs for several signal amplitudes and impedances. Higher source and load impedances improve THD, but reduce off-isolation.

### Off-Isolation at High Frequencies

In 50Ω systems, the high-frequency on-response of these parts extends from DC to above 100MHz with a typical loss of -2dB. When the switch is turned off, however, it behaves like a capacitor, and off-isolation decreases with increasing frequency. (Above 300MHz, the switch actually passes more signal turned off than turned on.) This effect is more pronounced with higher source-and-load impedances.

Above 5MHz, circuit board layout becomes critical, and it becomes difficult to characterize the response of the switch independent of the circuit. The graphs shown in the *Typical Operating Characteristics* were taken using a 50Ω source and load connected with BNC connectors.

### Power-Supply Sequencing-Free Operation

Most CMOS switches require specific power-supply sequencing in order to prevent the devices from latching up. The older MAX312/MAX313/MAX314 devices require a proper power-supply sequence of V+, V<sub>L</sub>, V-, and so forth. Otherwise, it becomes necessary to add signal diodes to the circuit in order to protect it from potential latchups. The new MAX312L/MAX313L/ MAX314L devices eliminate the need for a V<sub>L</sub> pin and permit the user to utilize any power-up sequence that is required. It is, however, important not to exceed the absolute maximum ratings because stresses beyond the listed ratings may cause permanent damage to the devices.

## Chip Information

TRANSISTOR COUNT: 92

PROCESS: CMOS

**MAX312L/MAX313L/MAX314L**

## **10Ω, Quad, SPST, +3V Logic-Compatible Analog Switches**

### **Test Circuits/Timing Diagrams**

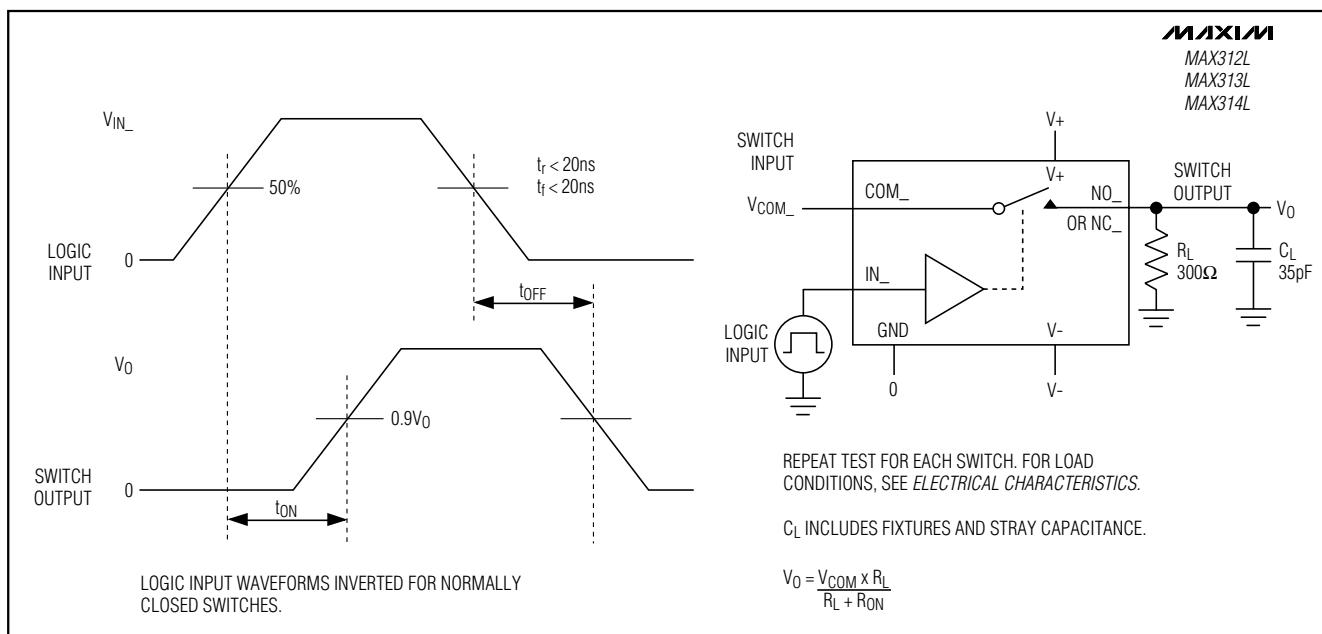


Figure 1. Switching-Time Test Circuit

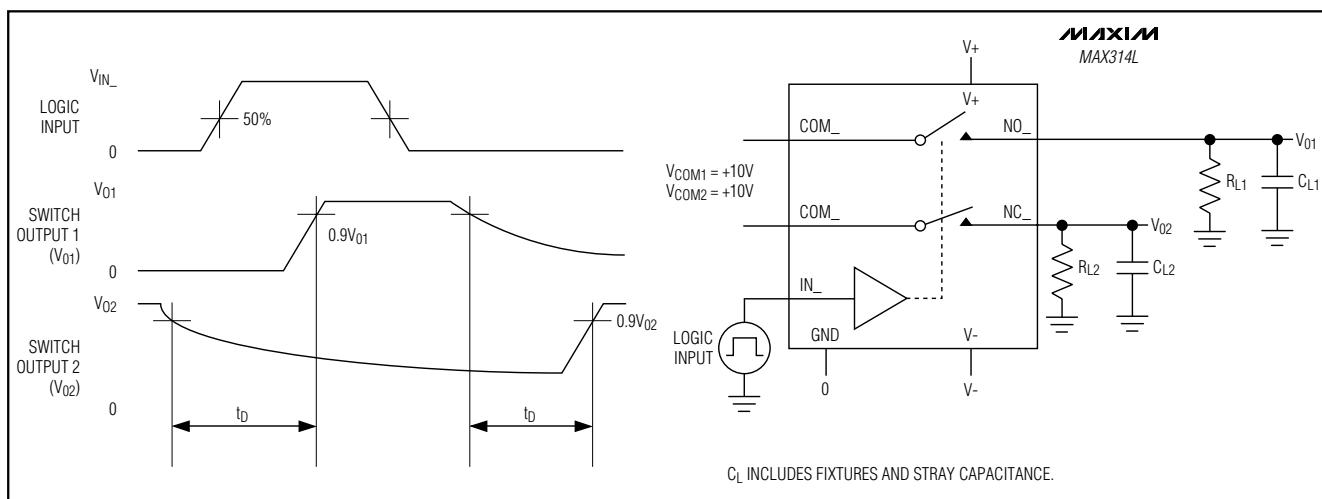


Figure 2. Break-Before-Make Test Circuit (MAX314L only)

# **10Ω, Quad, SPST, +3V Logic-Compatible Analog Switches**

## **Test Circuits/Timing Diagrams (continued)**

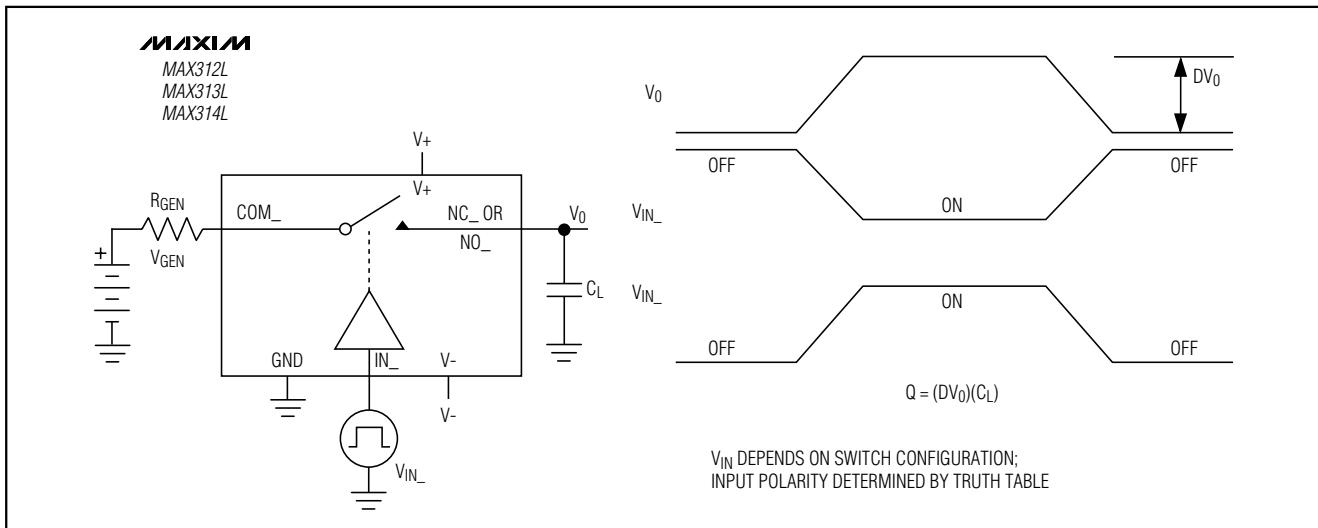


Figure 3. Charge Injection Test Circuit

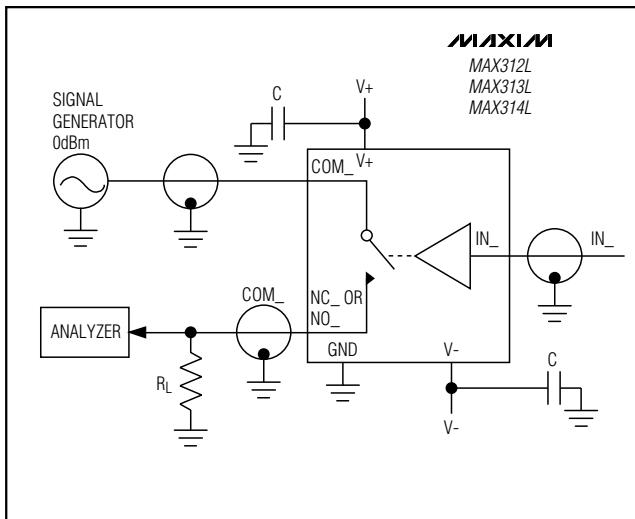


Figure 4. Off-Isolation Test Circuit

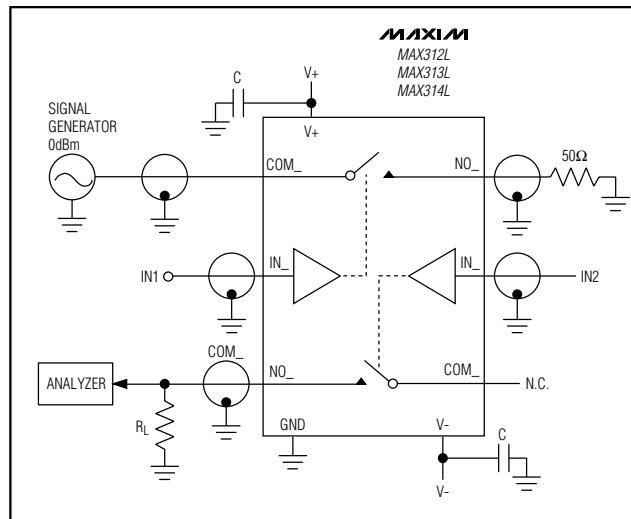


Figure 5. Crosstalk Test Circuit

# **10Ω, Quad, SPST, +3V Logic-Compatible Analog Switches**

## **Test Circuits/Timing Diagrams (continued)**

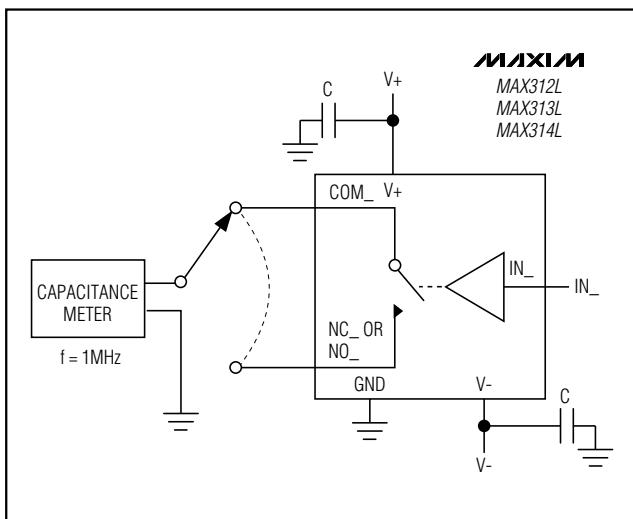


Figure 6. Channel Off-Capacitance Test Circuit

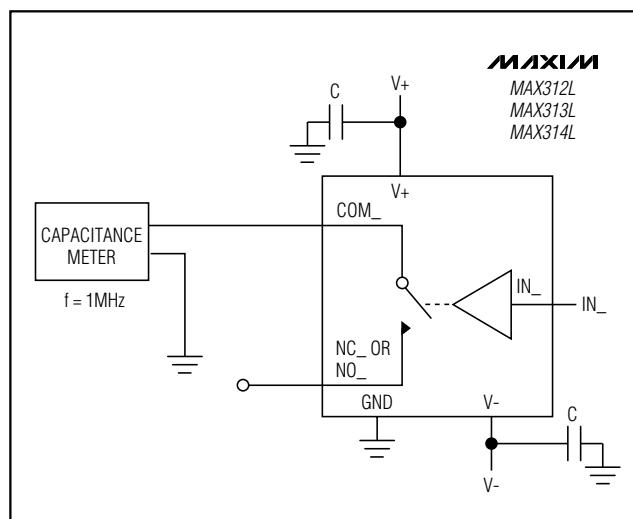


Figure 7. Channel On-Capacitance Test Circuit

## **Ordering Information (continued)**


PART	TEMP. RANGE	PIN-PACKAGE
MAX313LCUE	0°C to +70°C	16 TSSOP
MAX313LCSE	0°C to +70°C	16 Narrow SO
MAX313LCPE	0°C to +70°C	16 Plastic DIP
MAX313LEUE	-40°C to +85°C	16 TSSOP
MAX313LESE	-40°C to +85°C	16 Narrow SO
MAX313LEPE	-40°C to +85°C	16 Plastic DIP
<b>MAX314LCUE</b>	0°C to +70°C	16 TSSOP
MAX314LCSE	0°C to +70°C	16 Narrow SO
MAX314LCPE	0°C to +70°C	16 Plastic DIP
MAX314LEUE	-40°C to +85°C	16 TSSOP
MAX314LESE	-40°C to +85°C	16 Narrow SO
MAX314LEPE	-40°C to +85°C	16 Plastic DIP

# 10Ω, Quad, SPST, +3V Logic-Compatible Analog Switches

## Package Information


**MAX312L/MAX313L/MAX314L**

TSSOP NO PADS EPS

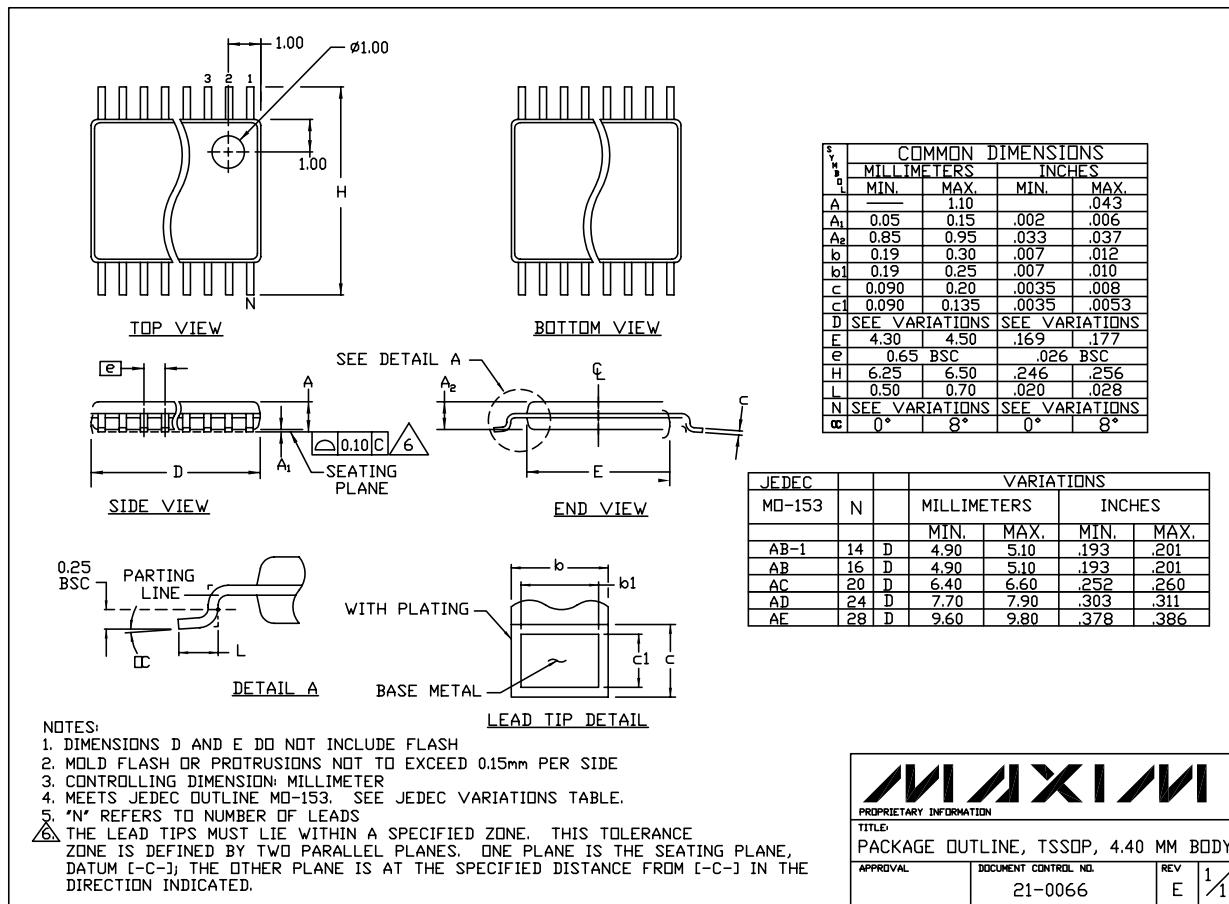

# **10Ω, Quad, SPST, +3V Logic-Compatible Analog Switches**


## **Package Information (continued)**

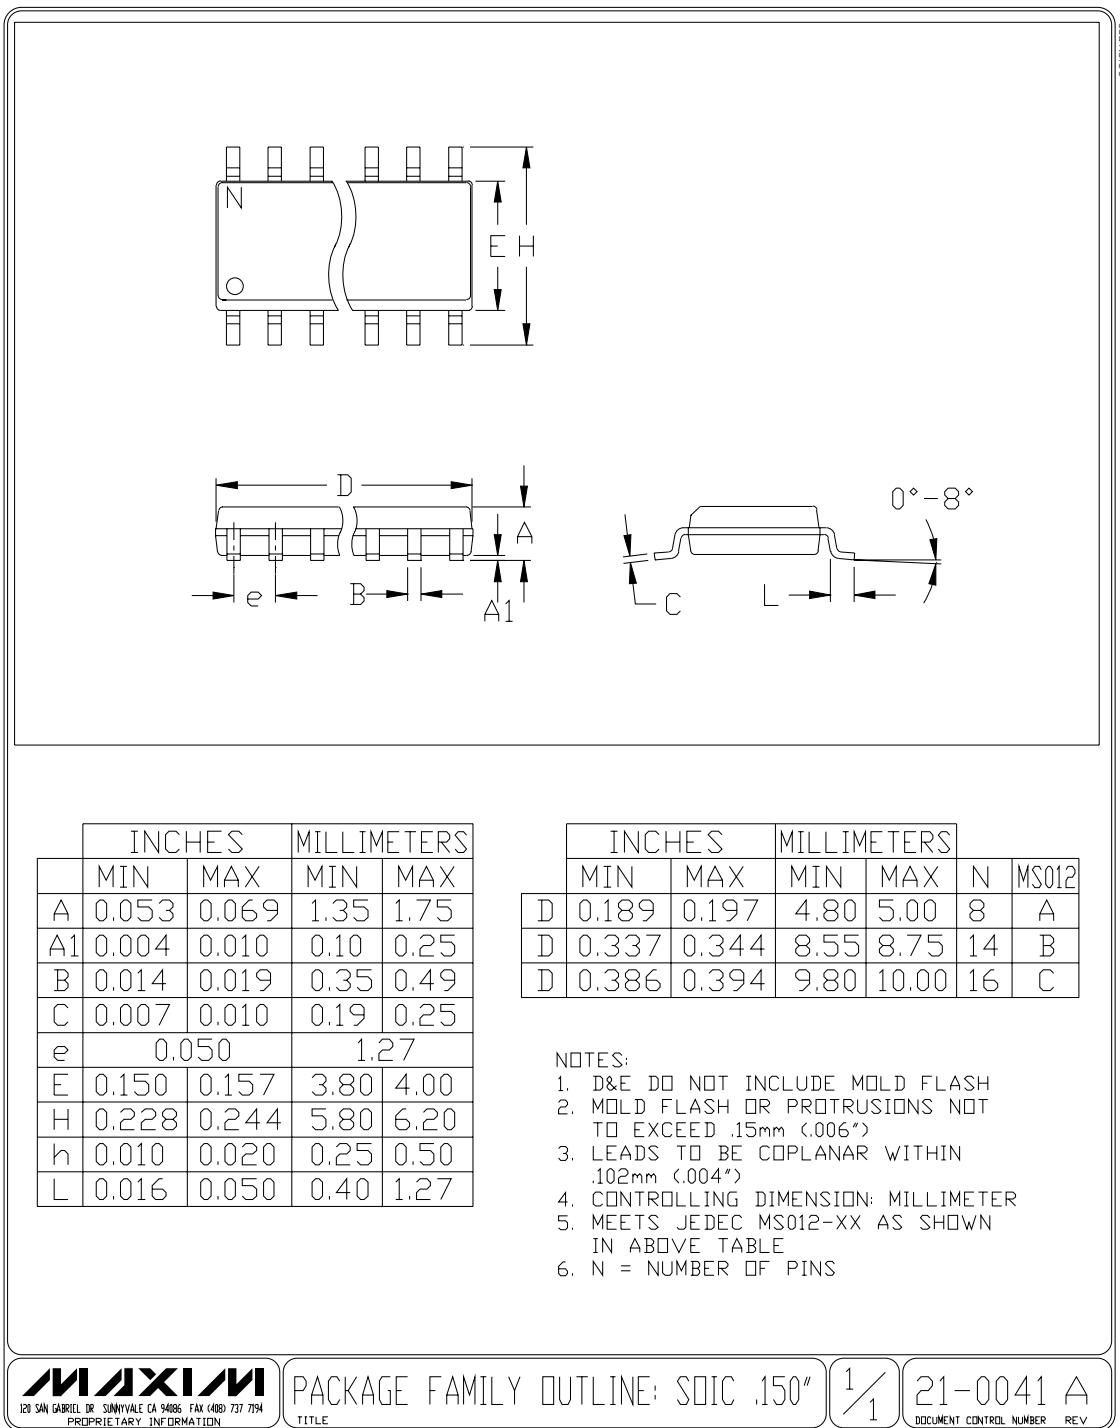

# 10Ω, Quad, SPST, +3V Logic-Compatible Analog Switches

## Package Information (continued)

**MAX312L/MAX313L/MAX314L**

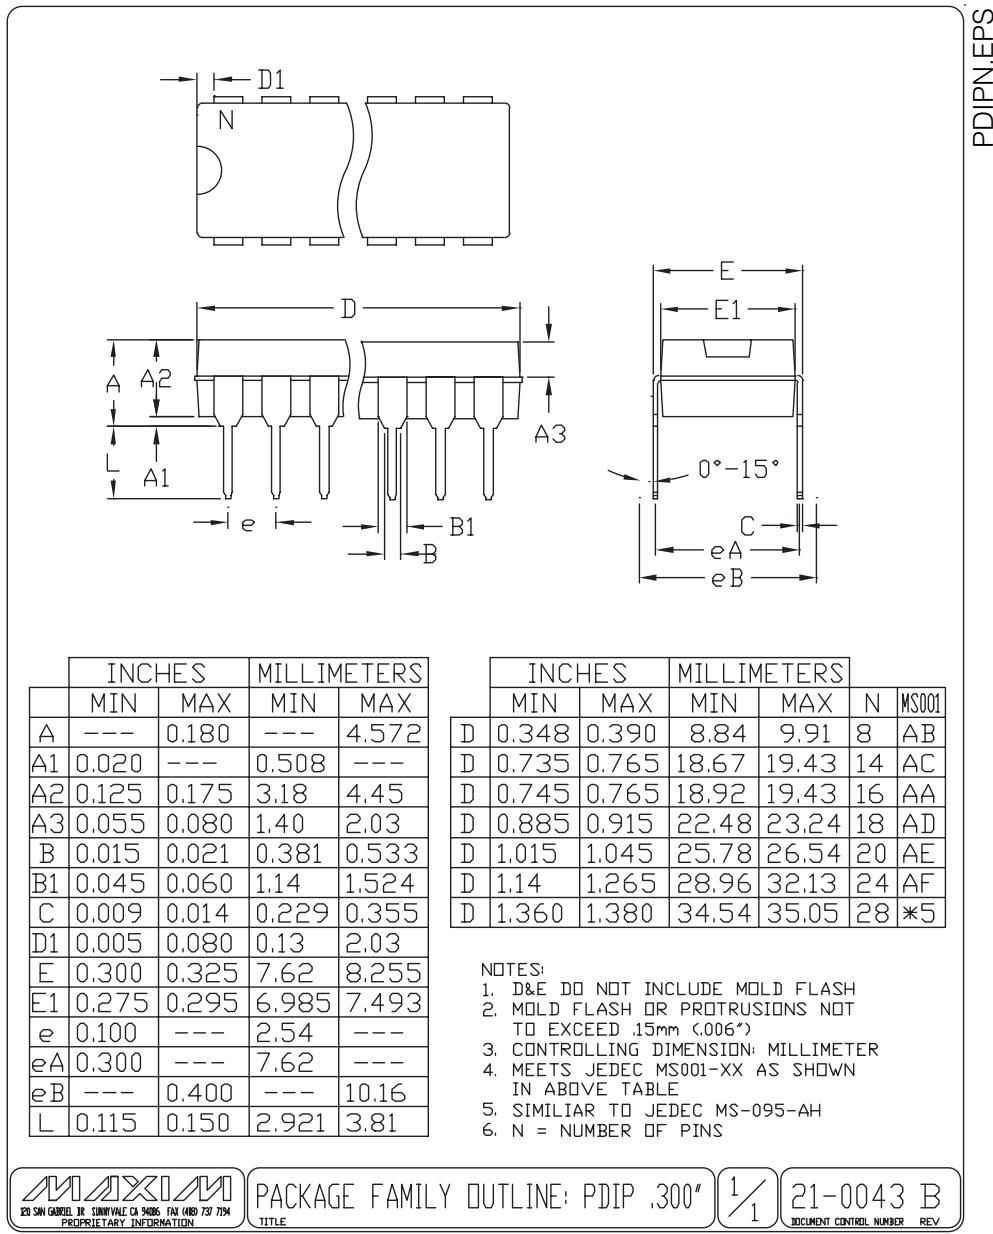

INCHES		MILLIMETERS	
MIN	MAX	MIN	MAX
A	---	0.180	4.572
A1	0.020	---	0.508
A2	0.125	0.175	3.18
A3	0.055	0.080	1.40
B	0.015	0.021	0.381
B1	0.045	0.060	1.14
C	0.009	0.014	0.229
D1	0.005	0.080	0.13
E	0.300	0.325	7.62
E1	0.275	0.295	6.985
e	0.100	---	2.54
eA	0.300	---	7.62
eB	---	0.400	---
L	0.115	0.150	2.921
			3.81

INCHES		MILLIMETERS		N	MS001
MIN	MAX	MIN	MAX		
D	0.348	0.390	8.84	9.91	8 AB
D	0.735	0.765	18.67	19.43	14 AC
D	0.745	0.765	18.92	19.43	16 AA
D	0.885	0.915	22.48	23.24	18 AD
D	1.015	1.045	25.78	26.54	20 AE
D	1.14	1.265	28.96	32.13	24 AF
D	1.360	1.380	34.54	35.05	28 *5

NOTES:

1. D&E DO NOT INCLUDE MOLD FLASH
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED .15mm (.006")
3. CONTROLLING DIMENSION: MILLIMETER
4. MEETS JEDEC MS001-XX AS SHOWN IN ABOVE TABLE
5. SIMILAR TO JEDEC MS-095-AH
6. N = NUMBER OF PINS

**MAXIM**  
120 SAN GABRIEL JR. SUNNYVALE CA 94086 FAX (408) 737-7574  
PROPRIETARY INFORMATION

PACKAGE FAMILY OUTLINE: PDIP .300"

TITLE

1  
1

21-0043 B

DOCUMENT CONTROL NUMBER REV

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

**Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**

13