

# KR Electronics

## General Description


KR 2784 is an 375 MHz bandpass filter with a minimum 3 dB bandwidth of 50 MHz. Other passband frequencies are available. Please consult the factory.

### Features


- 375 MHz Bandpass
- 50 MHz Bandwidth
- 50  $\Omega$  Source and Load
- SMA Connectors

## Typical Performance

**Passband Amplitude & Group Delay**  
(1 dB/div and 10 nsec/div)

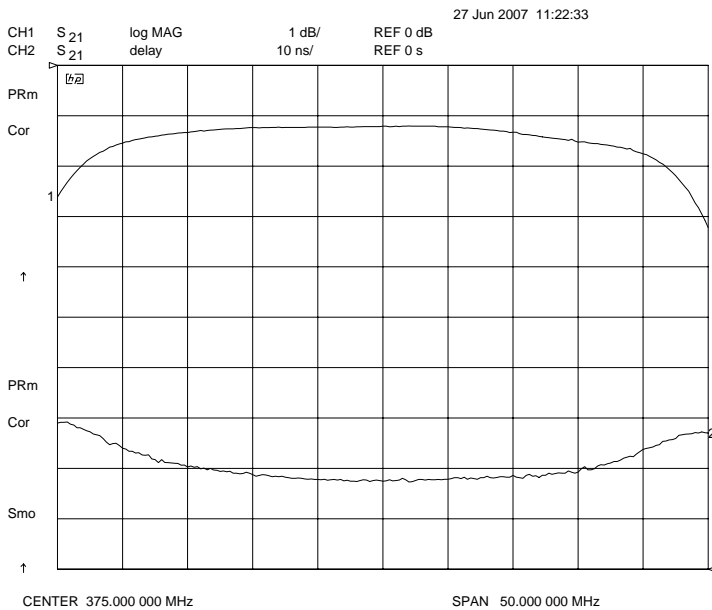

**Overall Response**  
(10 dB/div)

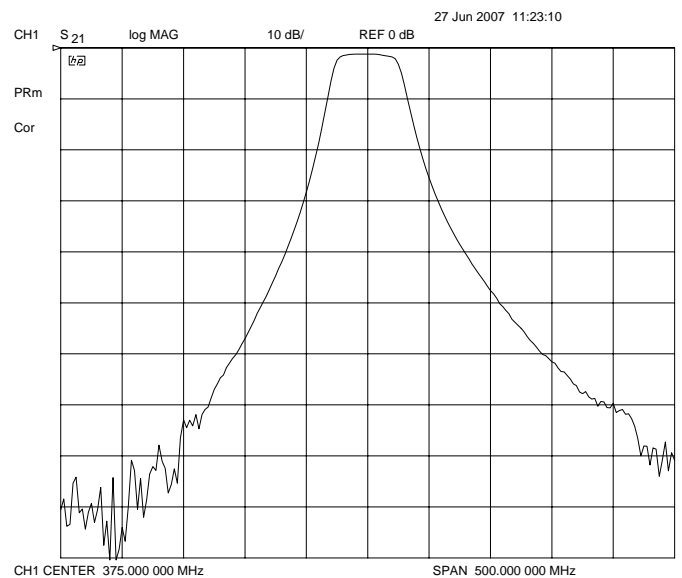

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001



Web www.krfilters.com  
Email sales@krfilters.com  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR 2784 Bandpass

## Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	375 MHz
Insertion Loss	< 2 dB
3 dB Bandwidth	50 MHz min
Attenuation at 255 MHz	> 54 dB
Attenuation at 495 MHz	> 48 dB
Source & Load	50 $\Omega$

## Physical Dimensions

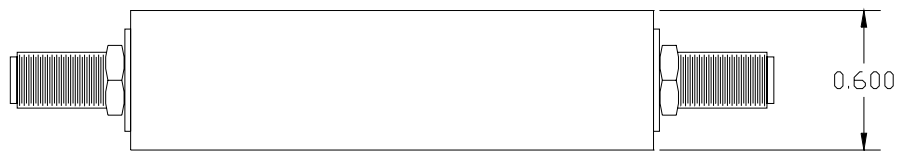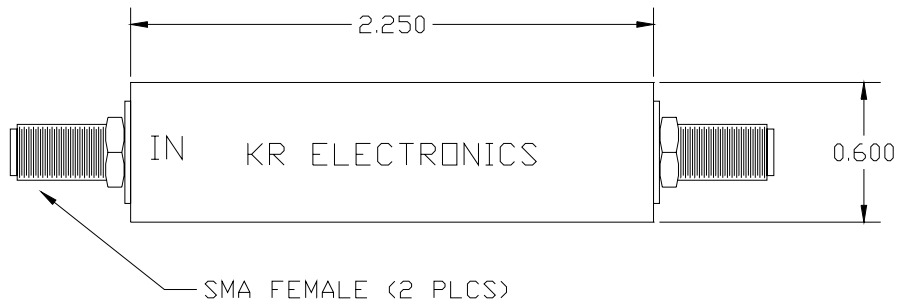

Dimensions in inches  
Metal Case