

KR 2480 Bandpass Filter

General Description


KR 2480 is an 18 KHz bandpass filter. Other center frequencies can be specified.

Features

- 18 KHz center frequency
- 50 Ω

Typical Measured Performance

Overall Response & Return Loss
(5 dB/div)

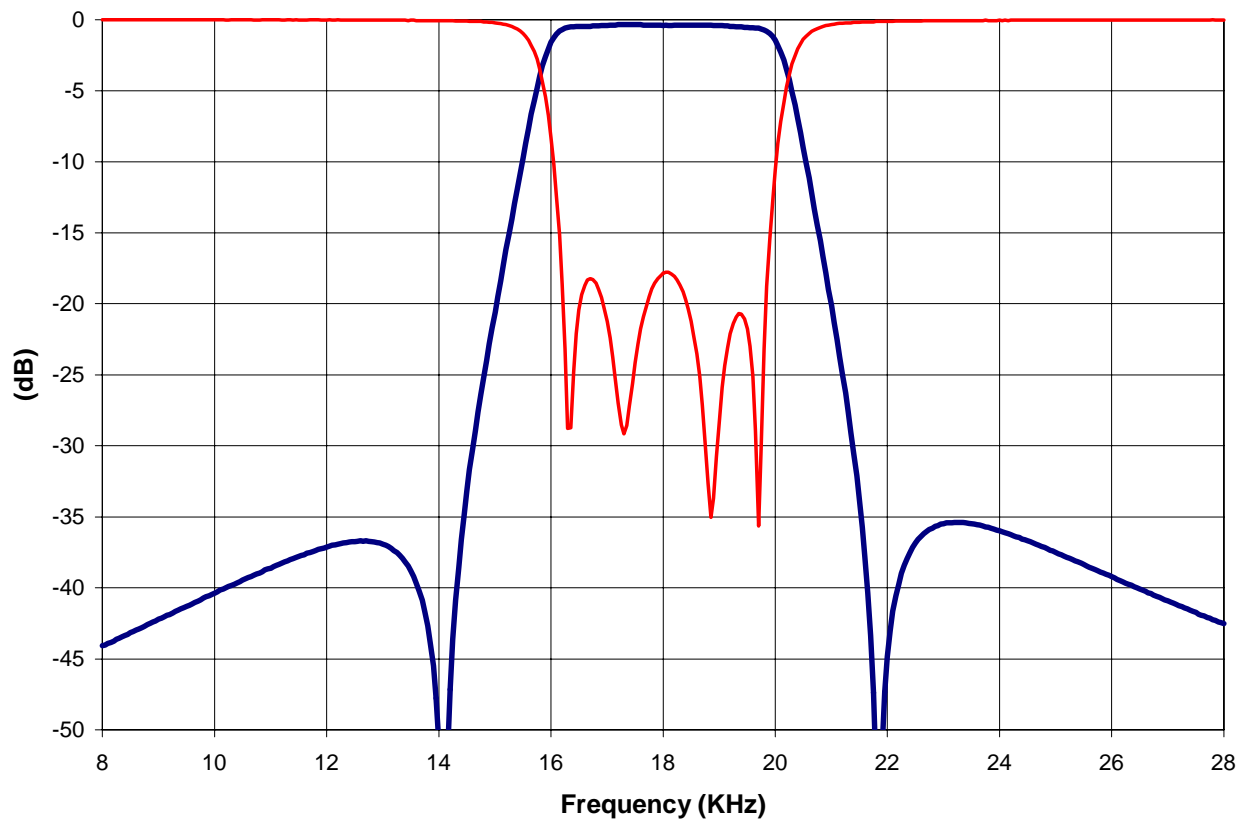

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2480 Bandpass Filter

Specifications

Parameter	Specification	Typical
Filter type	Bandpass	
Insertion Loss	< 2 dB	0.4 dB
Center Frequency	18 KHz	
Attenuation at 14.4 KHz	> 28 dB	35 dB
Attenuation at 16.2 KHz	< 2 dB	0.7 dB
Attenuation at 19.8 KHz	< 2 dB	0.8 dB
Attenuation at 21.6 KHz	> 28 dB	37 dB
Source and Load	50 Ω	Consult Factory for other

Physical Dimensions

