


# Bandpass Filter

KR 2377-2


## Amplitude Response

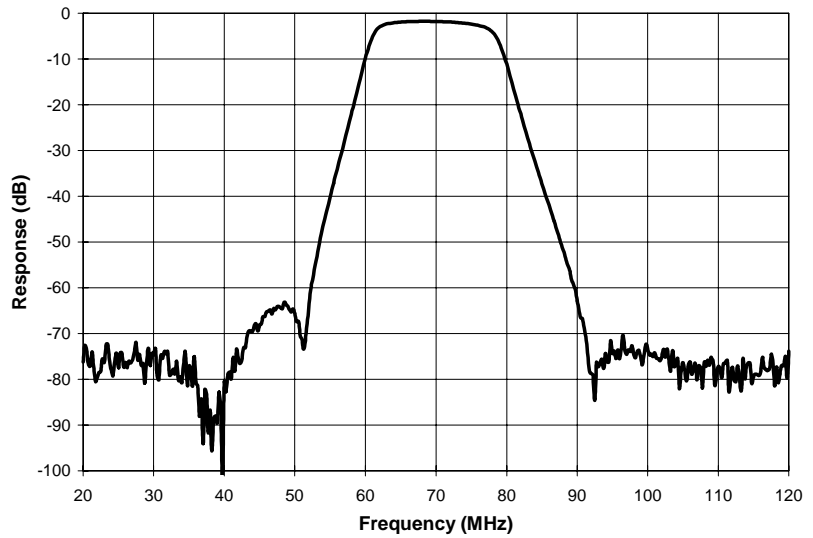

## Specifications

|                                  |               |
|----------------------------------|---------------|
| <b>KR Part Number</b>            | <b>2377-2</b> |
| <b>Filter Type</b>               | Bandpass      |
| <b>Center Frequency</b>          | 70 MHz        |
| <b>Insertion Loss</b>            | < 3 dB        |
| <b>1 dB Bandwidth</b>            | 12 MHz MIN    |
| <b>30 dB Bandwidth</b>           | 28 MHz MAX    |
| <b>55 dB Bandwidth</b>           | 40 MHz MAX    |
| <b>Source and Load Impedance</b> | 75 $\Omega$   |

## Outline Drawing

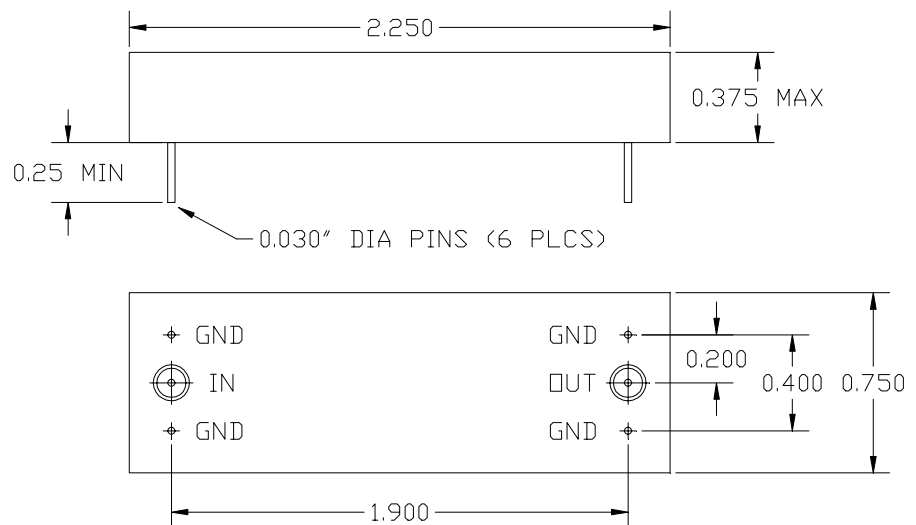

Dimensions in inches  
Metal Case

**KR Electronics**  
www.krfilters.com  
91 Avenel Street  
Avenel, NJ 07001  
732-636-1900