



XO5162 Series

14 pin DIP, 5.0 Volt, Sinewave, OCXO






- Standard DIP/DIL package offering tight stabilities, fast warm-up, and low current
- Ideal for PCS base stations, cellular base stations, phase locking, and SAR/SAT applications
- 5V Operation

Ordering Information					
	XO5162	A	R1	-R	00.0000 MHz
Product Series					
Stability/Temperature					
A:	±0.075 ppm, 0°C to +60°C				
B:	±0.15 ppm, -20°C to +70°C				
C:	±0.25 ppm, -40°C to +85°C				
Frequency Adjustment Method					
R1:	External Resistor Adjust (See Figure 1)				
V5:	Voltage Adjust (See Figure 2)				
RoHS Compliance					
Blank:	non-RoHS compliant part				
-R:	RoHS compliant part				
Frequency (Customer Specified)					

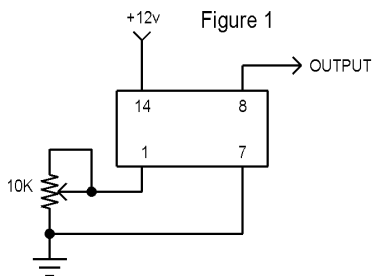

Pin Connections

PIN	FUNCTION
1	Frequency Adjust
7	Case ground & supply return
8	R.F. Output
14	Supply (+)



All dimensions in inches (mm).

PARAMETER	Symbol	Min.	Max.	Units	Condition
Frequency Range	F	10	20	MHz	
Operating Temperature	T _A	(See Ordering Information)		°C	
Stability Over Temperature	ΔF/F	(See Ordering Information)		ppm	
Short Term Stability			5 x 10 ⁻¹¹		0.1 to 30 secs.
Aging (First Year)			±0.7	ppm	
Aging (10 Years)			±4.0	ppm	
Frequency Vs. Supply			±0.1	ppm	
Frequency Vs. Load			±0.01	ppm	
Supply Voltage	V _{cc}	+4.8	+5.2	Volts	
Warm-Up Time		To spec after 30 secs.			0°C
Warm-Up Current			250	mA	After 10 secs.
Supply Current	I _{cc}		70	mA	+30°C
			110	mA	-20°C
Output Signal		Sinewave			
Output Level		1	2	V pk-pk	
Harmonics		-10		dBc	
Spurious Modes		-70		dBc	
Output Load			1K 5 pF		+10%
Frequency Adjustment (Pin 1)		±4		ppm	See Figure 1 or 2
Tuning Slope		Positive			
Input Impedance (Pin 1)		4.7K		ohms	
Phase Noise					(BW = 1 Hz) Offset from carrier
1 Hz			-80	dBc/Hz	
10 Hz			-110	dBc/Hz	
100 Hz			-135	dBc/Hz	
1 kHz			-145	dBc/Hz	
10 kHz			-150	dBc/Hz	
Mechanical Shock	2000 g, 0.3 mS, 1/2 sine				
Vibration	2000 Hz, 10 g				
Storage Temperature	-55°C to +125°C				
Hermeticity	Per MIL-STD-202, Method 112				
Solderability	EIAJ-STD-002				

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.