

## SURFACE MOUNT MIXER

### Features

- Frequency Range: LO & RF 5– 1000 MHz, IF DC – 1000 MHz
- L.O. Drive: +13 dBm
- Industry Standard SMT package
- Available in Tape-and -Reel
- Low Cost

### Description

The MXB-1001-13 is a medium-high drive level, surface mount mixer designed for applications that require small, low cost and highly reliable surface mount components. This mixer is a double balanced design for wideband high dynamic range use in communications up and down-converter applications.



### Specifications


Parameter	Min	Typ	Max
Frequency Range (MHz)	5		1000
Conversion Loss (dB)		6.5	9.0
LO – RF Isolation (dB)	25	35	
LO – IF Isolation (dB)	18	30	
IIP <sub>3</sub> (dBm)		+19	

Notes: Test Conditions-LO +13 dBm, RF -10 dBm, IF 30 MHz.  
Typical values represent Mid-band performance @ 25°C.


### Absolute Maximum Ratings

Parameter	Maximum
RF Power	+ 20 dBm
Operating Temperature	-50 to +80 °C
Storage Temperature	-65 to +100 °C
Re-flow Temperature	+ 240 °C

### Schematic

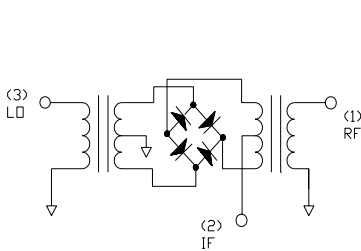


### Package – S07

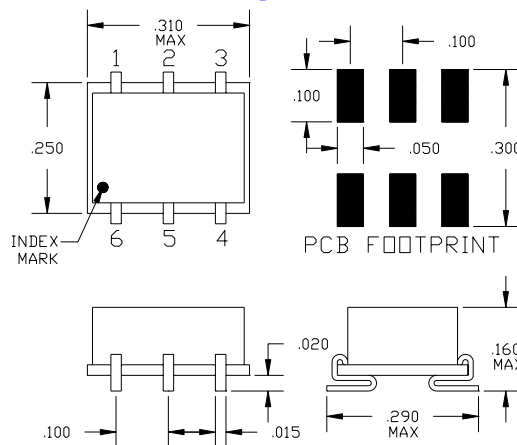


### Pin Functions

Function	Pin
LO INPUT	1
RF INPUT	4
IF OUTPUT	5
GROUND	2,3,6

Typical Test Data – Conversion Loss

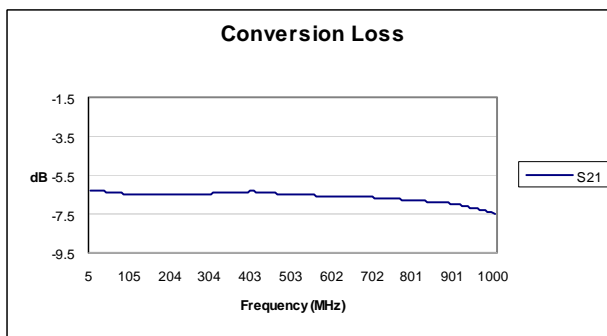

Typical Test Data – LO-RF and LO-IF Isolation

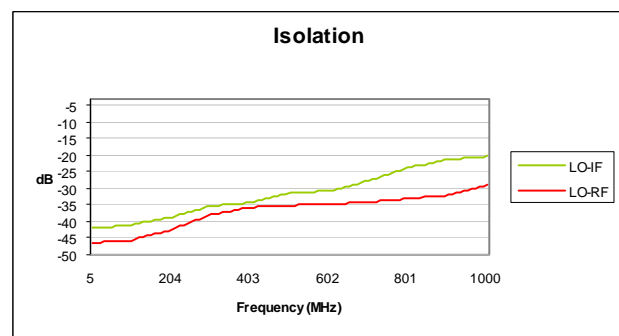

Specifications and information on this data sheet are subject to change without notice.