


### Features

- 7 dBm Output Level at 2430 MHz
- Channel Step Size : 1000 kHz
- 2<sup>nd</sup> Harmonic : < -20 dBc
- Spurious Level : < -70 dBc
- Lock Time : < 10 ms
- 30 mA Current Consumption

### Description

The plerow™ PLL synthesizer module was designed for use in wireless and wireline systems in a wide range of frequency from 50 MHz to 6 GHz. ASB's PLL provides exceptionally low spurious and phase noise performance with fast locking time and low current consumption. All products are available in a surface-mount type package.



### Specifications

Parameter	Unit	Min.	Typical	Max.
Frequency Range	MHz		2430	
Output Power	dBm	5	7	
Supply Voltage	V	4.75	5	5.25
Current Consumption	mA		30	50
Channel Step Size	kHz		1000	
2 <sup>nd</sup> Harmonics	dBc			-20
Spurious Level	dBc			-70
Lock Time	ms		3	10
Reference Frequency	MHz		13	
Reference Input Level	dBm		-	
Phase Noise (C / N)				
@ 1 kHz	dBc/Hz		-73	-63
@ 10 kHz			-100	-90
@ 100 kHz			-120	-110
Output Impedance	Ω		50	
Operating Temp. Range	°C	-40	25	80
Package Type & Size	mm	SMT, 19.0W×19.0L×5.8H		

### More Information


Website: [www.asb.co.kr](http://www.asb.co.kr)  
 E-mail: [sales@asb.co.kr](mailto:sales@asb.co.kr)

Tel: (82) 42-528-7223  
 Fax: (82) 42-528-7222

ASB Inc., 4th Fl. Venture Town  
 Bldg., 367-17 Gojeong-Dong,  
 Seo-Gu, Daejeon 302-716, Korea

1) Measurement conditions are as follows: T = 25°C, V<sub>CC</sub> = 5 V, Freq. = 2430 MHz, 50 ohm system.  
 2) Frequency stability of internal ref. TCXO is +/- 2.5 ppm (max.) over the operating temperature range.

### Outline Drawing

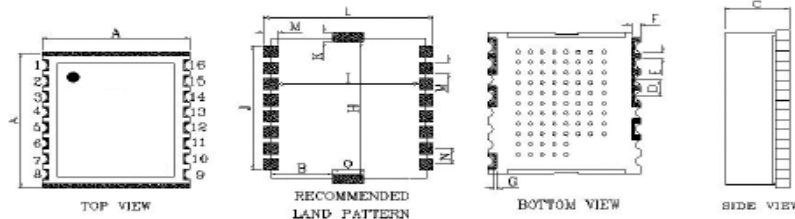

Dimension (unit : mm) ±0.02														
A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
19.0	5.5	5.8	2.03	0.51	1.35	0.45	17.0	16.3	15.75	2.0	20.6	1.52	2.03	8.0
±0.1														

Pin Description			
Pin No.	Application	Pin No.	Application
1	GND	9	VCC(VCO)
2	GND	13	RF OUT
3	GND	15	VCP(PLL)
4	GND	16	LOCK DETECT
All other Pins are Grounded / Internal ROM & TCXO			