
## CGM-18-6002 Module Amplifier 6 GHz - 18 GHz

This Module Amplifier offers exceptional performance over the band 6 GHz to 18 GHz with 25 dBm P1dB output power and 5 dB Gain.

Teledyne Microwave amplifiers are balanced or feedback designs and manufactured with the latest MIC & MMIC technology. The GaAs FET's used in these amplifiers are well established proven devices from multiple sources.

Teledyne Microwave offers a complete line of Narrow and broadband Amplifiers covering the frequency range 500 MHz to 40 GHz. These products are available in either connectorized packages or as modules. For a complete list of these products and more, please visit our website.

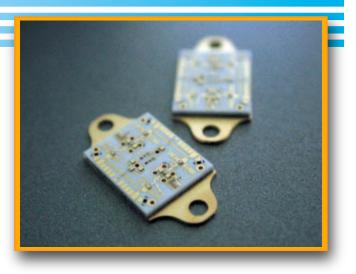

Other products from Teledyne Microwave include: Transceivers, Synthesizers, and YIG Products

Specifications:


Model Number: CGM-18-6002 Frequency Range: 6 GHz – 18 GHz Gain (min): 5 dB Gain Vs Temp Coefficient per 1 deg C: -0.011 dB Noise Figure (max): 9.5 dB Output Power @ 1dB Compression: 25 dBm Gain Flatness Vs Frequency: +/-0.6 dB 3<sup>rd</sup> Order Intercept (Typ): Contact Factory Power Supply: Input Voltage: 11.5 to 15 VDC Current @ 12 VDC (typ): 320 mA Current @ 12 VDC (max): Contact Factory Case Type (See attached Outline): 1248NP Temperature Range: +25C



ISO 9001:2000

1274 Terra Bella Avenue, Mountain View, CA 94043 • PHN# 800.832.6869 or +1.650.962.6944 • FAX# 650.962.6845 www.teledynemicrowave.com • microwave@teledyne.com

## CGM-18-6002 Module Amplifier 6 GHz - 18 GHz

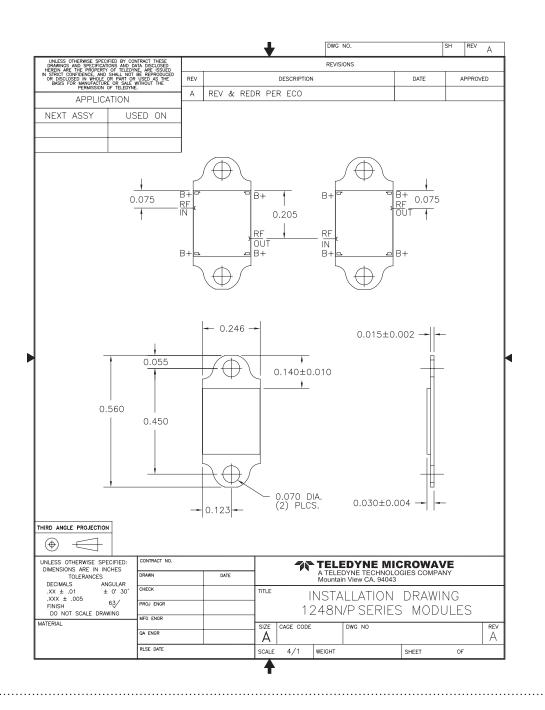



## ISO 9001:2000

1274 Terra Bella Avenue, Mountain View, CA 94043 • PHN# 800.832.6869 or +1.650.962.6944 • FAX# 650.962.6845 www.teledynemicrowave.com • microwave@teledyne.com