




# SURFACE MOUNT CHIP LED LAMPS

## BL-Hxxx6G (0603-0.4mm) Series



Anode Mark For

- BL - HSxx6G
- BL - HDxx6G
- BL - HFxx6G

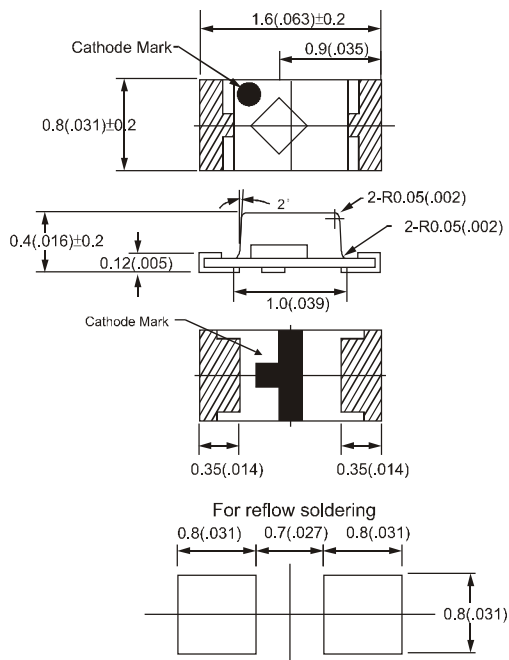

NOTE:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.10(.004)$  unless otherwise specified.
3. Specifications are subject to change without notice.

■ Absolute Maximum Ratings  
( $T_a=25^\circ\text{C}$ )

	UNIT	SPEC.
IF	mA	30
IFp	mA	100
VR	V	5
Topr	$^\circ\text{C}$	-25 ~ +80
Tstg	$^\circ\text{C}$	-30 ~ +85

Part No.	Chip				Lens Appearance	Electro-optical Data (At 20mA)				Viewing Angle $2\theta$ 1/2 (deg)
	Material	Emitted Color	$\lambda_p$ (nm)	$\lambda_d$ (nm)		Vf (V)		Iv (mcd)		
						Typ.	Max.	Min.	Typ.	
BL-HGE36G	AlGaInP	Super Yellow Green	570	570	Water Clear	2.0	2.6	18.5	35.0	120°
BL-HGK36G	AlGaInP	Green	525	525		3.5	4.0	63.0	160.0	
BL-HG436G	InGaN	Bluish Green	505	505		3.5	4.0	63.0	120.0	
BL-HG636G	InGaN	Green	525	525		3.5	4.0	63.0	160.0	
BL-HJC36G	AlGaInP	Super Amber	610	605		2.0	2.6	63.0	100.0	
BL-HJE36G	AlGaInP	Super Orange Red	630	620		2.0	2.6	63.0	100.0	
BL-HKC36G	AlGaInP	Super Yellow	590	589		2.0	2.6	63.0	120.0	
BL-HUB36G	AlGaInP	Super Red	645	632		2.1	2.6	28.0	50.0	

Part No.	Chip				Lens Appearance	Electro-optical Data (At 5mA)				Viewing Angle $2\theta$ 1/2 (deg)
	Material	Emitted Color	$\lambda_p$ (nm)	$\lambda_d$ (nm)		Vf (V)		Iv (mcd)		
						Typ.	Max.	Min.	Typ.	
BL-HB336G	AllnGaIn	Super Blue	460	465-470	Water Clear	2.8	3.2	8.2	15.0	120°
BL-HB536G	AllnGaIn	Super Blue	470	470-475		2.8	3.2	8.2	20.0	