



TAYCHIPST

FAST RECOVERY DIODE

ERC91-02


200V 3.0A

FEATURES

- * High current capability
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * Fast switching for high efficiency

Mechanical Data

Case : DO-201AD Molded plastic
 Epoxy : UL94V-O rate flame retardant
 Lead : Axial lead solderable per MIL-STD-202,
 Method 208 guaranteed
 Polarity : Color band denotes cathode end
 Mounting position : Any
 Weight : 1.16 grams

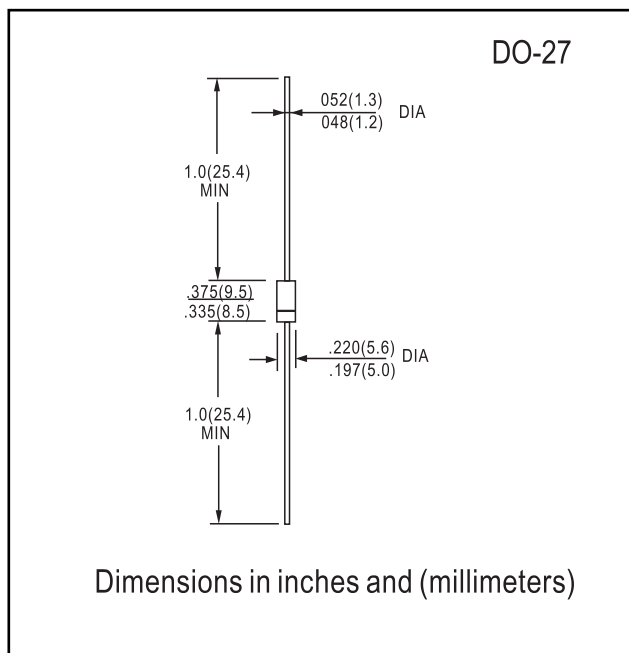

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specific.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

RATING	SYMBOL	VALUE	UNIT
Maximum Repetitive Peak Reverse Voltage	VRRM	200	V
Maximum DC Blocking Voltage	VR(DC)	160	V
Maximum Average Forward Current	IF(AV)	3.0	A
Maximum Non-repetitive Peak Forward Surge Current (Sine wave, 10 ms)	IFSM	50	A
Maximum Forward Voltage at IF = 3.0 A	VF	0.95	V
Maximum Reverse Current at VRRM	IRRM	100	μA
Maximum Reverse Recovery Time (Note 1)	Trr	0.035	μs
Junction Temperature Range	TJ	- 40 to + 150	°C
Storage Temperature Range	TSTG	- 40 to + 150	°C

Notes :

(1) Reverse Recovery Test Conditions :IF = 100 mA, IR = 200 mA.

RATINGS AND CHARACTERISTIC CURVES ERC91-02

FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

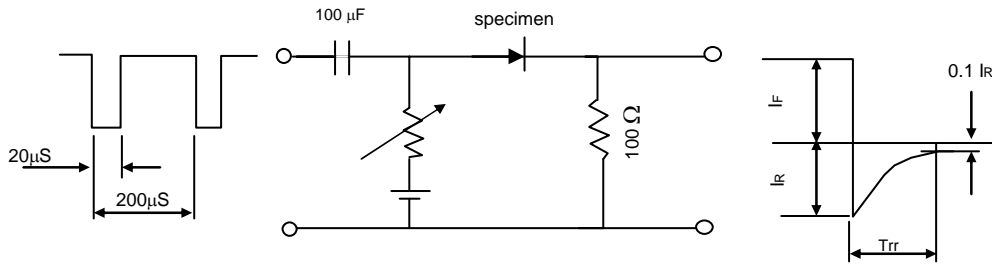


FIG.2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

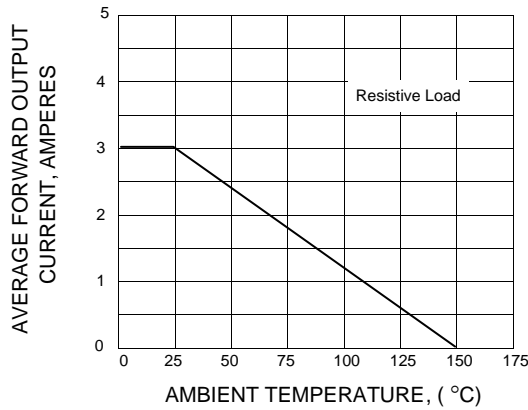


FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

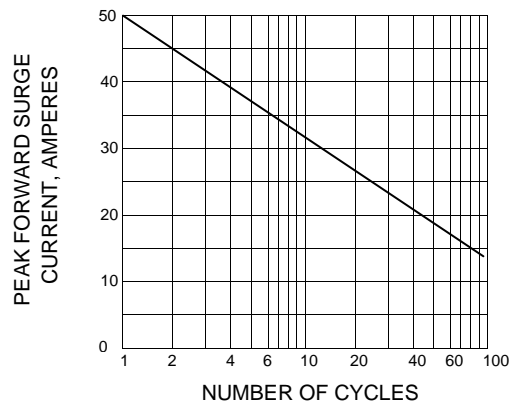


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

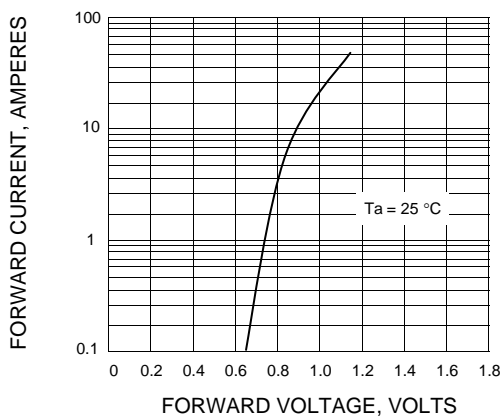


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

