



1. Mechanical Dimensions:

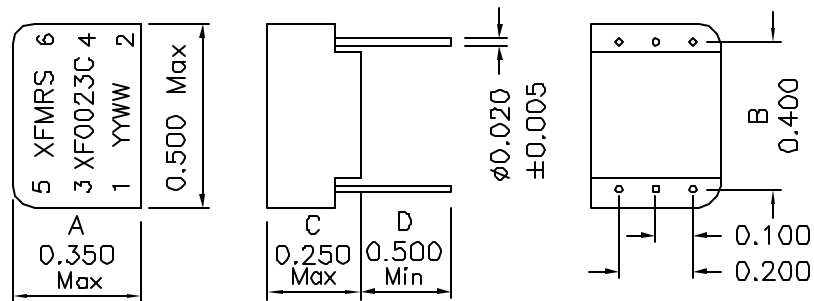

2. Schematic:

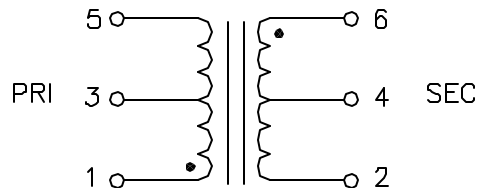

3. Electrical Specifications: @25°C

Isolation: 1500 Vrms

Insulation Resistance: 10,000 MOhms

Turns Ratio: 1CT:1CT $\pm 5\%$ (Pri/Sec)

PRI OCL: 2000uH Minimum @100KHz 50mV

Cw/w: 37pF Maximum @100KHz 50mV (PRI/SEC)

PRI LL: 0.80uH Max @100KHz 50mV

⊗ OTHER WINDINGS SHORTED

DC Resistance: 2.50 Ohms Maximum (EACH WINDING)

ET Constant: 16.0 V-us Minimum

Rise Time: 8.2ns Maximum

Notes:

- Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: > 28%
- Insulation System: Class F 155°C. UL file E151556
- Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
- Storage Temperature Range: -55°C to +125°C
- Aqueous wash compatible
- Electrical and mechanical specifications 100% tested
- RoHS Compliant Component

DOC REV: A/3

PROPRIETARY

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc www.XFMRS.com		Title: Data Coupling Transformer	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ± 0.010 Dimensions in Inch		P/N: XF0023C	REV. A
SCALE 2:1 SHT 1 OF 1		DWN. 廖玉坤	Jan-10-07
		CHK. 李清儿	Jan-10-07
		APP. BW	Jan-10-07