


SMD Power Inductors for Automotive / Industrial Applications (NS series)

NS10145T102MNV

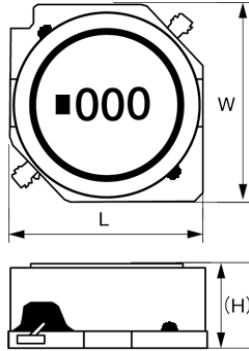

■ Features

- Item Summary
1000 μ H(\pm 20%), 0.41A, 0.32A
- Lifecycle Stage
Mass Production
- AEC-Q200 qualified
- Standard packaging quantity (minimum)
Taping 2000pcs(500pcs*4reel)

■ Products characteristics table

CaseSize (EIA/JIS)	-/101101
Inductance	1000 μ H(\pm 20%)
Inductance Measuring Frequency	100kHz
Rated Current -Saturation Current	0.41A
Rated Current -Temperature Rise Current	0.32A
DC Resistance (max)	3.096 Ω
Avg. of DC.Resistance	2.58 Ω
Self-resonant Frequency (min)	1.7MHz
RoHS Compliance	Yes
Halogen Free	Yes
Soldering Method	Reflow


■ External Dimensions

L	10.1mm \pm 0.3
W	10.1mm \pm 0.3
H	4.5mm \pm 0.35

■ Recommended Land Patterns

【推奨ランドパターン】
 実装上の注意
 ・実装性能を確認の上ご使用くださいませうお願いいたします。
 ・本製品のはんだ付けはリフローはんだ工法に限ります。

【Recommended Land Patterns】
 Surface Mounting
 ・Mounting and soldering conditions should be checked beforehand.
 ・Applicable soldering process to these products is reflow soldering only.



SMD Power Inductors (NS series)

Type	A	B	C
NS 10145	2.5	5.6	3.2
NS 10155	2.6	5.6	3.2
NS 10165	2.5	5.6	3.2
NS 12555	2.5	8.6	3.2
NS 12565	2.5	8.6	3.2
NS 12575	2.5	8.6	3.2

unit:mm

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.
 Before making final selection, please check product specification.