



TAPE FOR AUTOMATED PICKUP



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY.
- ▲ 4. OPERATING FORCE: 500± 100 gf
5. TRAVEL: 0.6± 0.25 mm
6. CONTACT RATING: 25mA, 24VDC
7. CONTACT RESISTANCE: 100mΩ MAX.
8. INSULATION RESISTANCE: 100MΩ MIN @ 500VDC
9. DIELECTRIC STRENGTH: 300VAC 1 MIN.
10. LIFE: 1,000 CYCLES.
11. OPERATING TEMPERATURE: -40°C to 85°C
- ▲ 12. PACKAGING: 4,000 PCS PER REEL
13. ▲ DENOTES CRITICAL PARAMETER.
14. 2002/95/EC (ROHS) COMPLIANT
15. SWITCHES TO BE SHIPPED WITH THE ACTUATORS IN THE 'OFF' POSITION

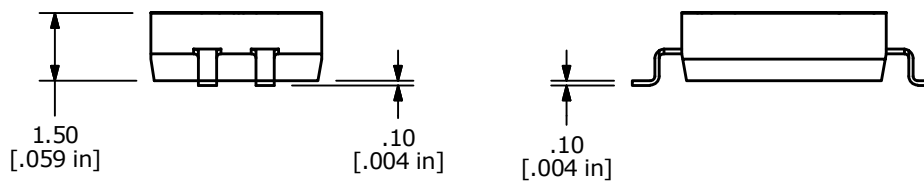

TITLE					KAN1102RR-OFF (OFF POSITION)				
SCALE	DATE	DR	DWG	REV					
6:1	12/7/2016	MW	N111253	A					

A	22629	New Release	12/7/16	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED