

Features

- ◆ I/O isolation voltage 3000 VACrms
- ◆ Reinforced insulation, rated for 300 VAC working voltage
- ◆ Certified to IEC/EN/UL 60950-1 safety standards
- ◆ Safety barrier 100 % production test
- ◆ Low coupling capacity
- ◆ Single-in-line package (SIP)
- ◆ Lead-free design, RoHS compliant
- ◆ 3-year product warranty



The TMV-EN series is a range of 1 Watt non-regulated DC/DC converters with high I/O-isolation. This product features an isolation barrier which is approved for supplementary an reinforced insulation. SMD construction and a special designed toroidal transformer made it possible to built these converters in a standard SIP package with a very small footprint. These features making the TMV-EN series an economical solution in many DC/DC converter applications requiring safety agency approval.

Models

Order code	Input voltage	Output voltage	Output current max.	Efficiency typ.
TMV 0505 EN	5 VDC ±10 %	5 VDC	200 mA	66 %
TMV 0512 EN		12 VDC	80 mA	66 %
TMV 0515 EN		15 VDC	65 mA	66 %
TMV 0505D EN		±5 VDC	±100 mA	66 %
TMV 0512D EN		±12 VDC	±40 mA	72 %
TMV 0515D EN		±15 VDC	±35 mA	73 %
TMV 1205 EN	12 VDC ±10 %	5 VDC	200 mA	66 %
TMV 1212 EN		12 VDC	80 mA	66 %
TMV 1215 EN		15 VDC	65 mA	66 %
TMV 1205D EN		±5 VDC	±100 mA	66 %
TMV 1212D EN		±12 VDC	±40 mA	74 %
TMV 1215D EN		±15 VDC	±35 mA	75 %

Input Specifications

Input current no load / full load	5 Vin models: 55 mA / 285 mA typ. 12 Vin models: 30 mA / 115 mA typ.
Surge voltage (1 s max.)	5 Vin models: 9 V max. 12 Vin models: 29 V max.
Reverse polarity input current	0.3 A max.
Reflected input ripple current	can be reduced by ext. 1–3.3 µF polyester film capacitor
Input filter	internal capacitor
Input fuse	recommended, required for compliance with CB
– recommended fuse rating	5 V models: 500 mA 12 V models: 200 mA

Output Specifications

Voltage set accuracy	±1 % typ. / ±3 % max.
Voltage balance (dual output models, balanced loads)	±0.1 % typ. / ±1 % max.
Regulation	– Input variation (1 % change of Vin) 1.2 % typ. / 1.5 % max. – Load variation (20 – 100 %) <10 %
Ripple and noise (20 MHz Bandwidth)	100 mVp-p typ. / 150 mVp-p max.
Temperature coefficient	±0.01 %/K typ. / ±0.02 %/K max.
Short circuit protection	limited 0.5 s max.
Capacitive load	single output models: 680 µF max. dual output models: 220 µF max. (each output)

Isolation / Safety

Isolation voltage	– Isolation test voltage (tested for 1 s) 4'500 Vpk – I/O isolation voltage (60 s) 3'000 VAC – Rated max. working voltage 300 VAC / 640 Vpk
Isolation capacitance (input/output)	15 pF typ. / 20 pF max.
Isolation resistance (input/output)	>10 GOhm
Safety standards	IEC 60950-1:2005 +A1:2009 EN 60950-1:2006 +A1:2010 +A11:2009 +A12:2011 UL 60950-1, CSA C22.2 No. 60950-1-03 www.tracopower.com/overview/tmv-en
– Certification documents	

General Specifications

Temperature ranges	– Operating –25°C to +85°C – Max. ambient approved IEC/UL 60950-1 +70°C – Case temperature +90°C max. – Storage temperature –50°C to +125°C
Derating	2.85 %/K above 70°C
Humidity (non condensing)	95 % rel H max.
Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign)	>2'000'000 h
Switching frequency	50 to 100 kHz (frequency modulation)
Altitude during operation	4'000m max. approved
Environmental compliance	– Reach www.tracopower.com/products/reach-declaration.pdf – RoHS RoHS directive 2011/65/EU


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Physical Specifications

Casing material	non conductive plastic (UL 94V-0 rated)
Package weight	3.9 g (0.14 oz)
Soldering temperature	max. 260°C / 10 s

Supporting documents: www.tracopower.com/overview/tmv-en

Outline Dimensions

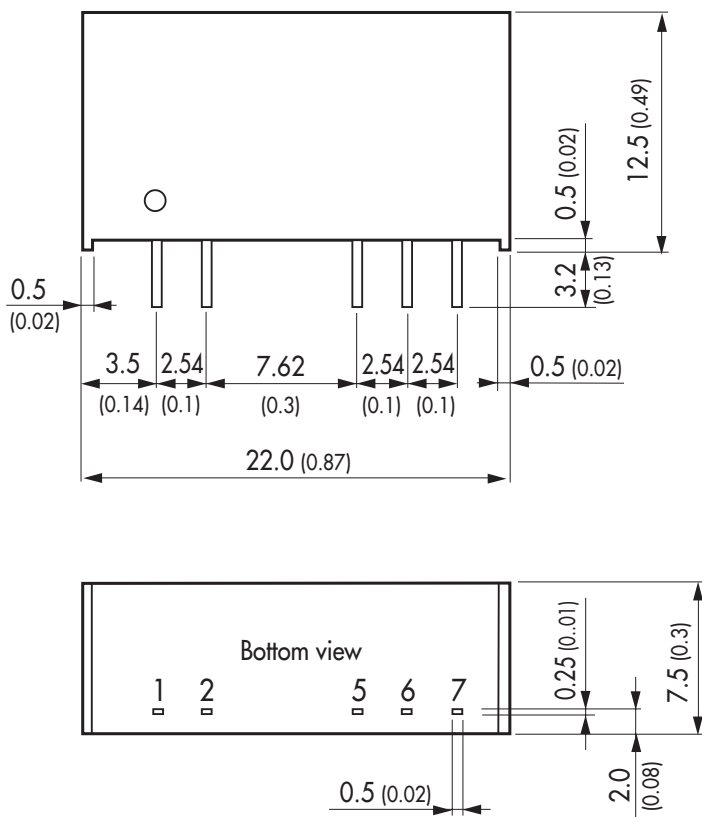

Pin-Out		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
5	-Vout	-Vout
6	No pin	Common
7	+Vout	+Vout

Dimensions in [mm], () = Inch
Tolerance ±0.5 (0.02)
Pin pitch tolerance ±0.13 (0.005)
Pin width tolerance ±0.05 (0.002)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com