



226PGM050M

RADIAL LEAD LOW PROFILE

Parts are RoHS compliant

Date code when parts became RoHS: 23

APPLICATIONS: handheld device, general purpose, bypass, coupling

ELECTRICAL SPECIFICATIONS

Capacitance: 22 μ F

Dissipation Factor: 0.1 Max at 120 Hz and 20°C

Temperature Range: -55°C to +105°C

ESR: 7.536 Ohms Max at 20°C and 120 Hz

Impedance: N/A

Tolerance: -20 %, +20 %

WVDC: 50 Volts DC

SVDC: 63 Volts DC

Ripple Current: 65 mA at 120 Hz and 85°C

Impedance Ratios:-25°C/20°C 2 and -40°C/20°C - 3

Leakage Current: .01CV or 3 μ A, whichever is greater
11 μ A after 2 Minutes

Load Life: 1000 hours at 105°C with 100 % of rated voltage and with 0 % of rated ripple current

Capacitance Change: \leq 25% of initial measured value

Dissipation Factor: \leq 200% of maximum specified value

Leakage Current: \leq 100% of maximum specified value

Frequency Multipliers:

50 HZ	120 HZ	400 HZ	1 KHZ	10 KHZ	100 KHZ
0.85	1	1	1.15	1.2	1.2

Temperature Multipliers:

45°C	60°C	70°C	65°C	75°C	85°C	105°C	125°C
2	1.9	1.7	1.8	1.4	1.4	1	0

PHYSICAL DIMENSIONS

Diameter (D): 8 mm + 0.5 mm

Length (L): 7 mm + 1 mm


Lead Spacing (S): 3.5 mm +/- 0.5 mm

Coating: BrownPET sleeving

Lead Wire Diameter (d): 0.5 mm +/- 0.05 mm

Lead Length: 15 mm +/- MIN mm

Lead Finish: Matte Tin

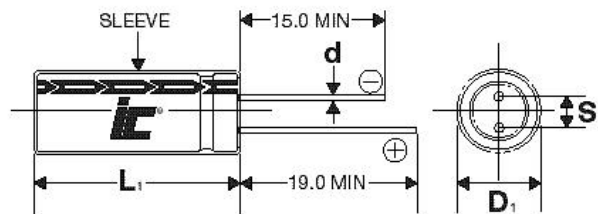

3757 W. Touhy Ave. Lincolnwood, IL 60712 (847) 675-1760 FAX (847) 673-2850
Illinois Capacitor (HK) Ltd., Tel: 85227930931, Fax: 85227930731, www.illcap.com.hk
© Copyright 2017 Illinois Capacitor. A division of Cornell Dubilier, All Rights Reserved